


NOTE:

TO CONNECT MOUSE SWITCHES, REMOVE BOTTOM ENCLOSURE AND CABLE GROMMET. RUN SWITCH CABLE TO PCB, CONTACT "CTI" FOR PINOUTS.

ORDERING INFORMATION:

- USE ONLY IF POWER OPTION IS "0"
- Q RS232 OPTIONAL CABLE REF. B811610 WITH "AT" CONNECTOR (LEGACY)
- P RS232 OPTIONAL CABLE REF. B811610 WITH PS/2 CONNECTOR (LEGACY)

- DZ LOW TEMPERATURE AND CONFORMAL COATED PCB
- Z CONFORMAL COATED PCB
- V VIBRATION DAMPENED

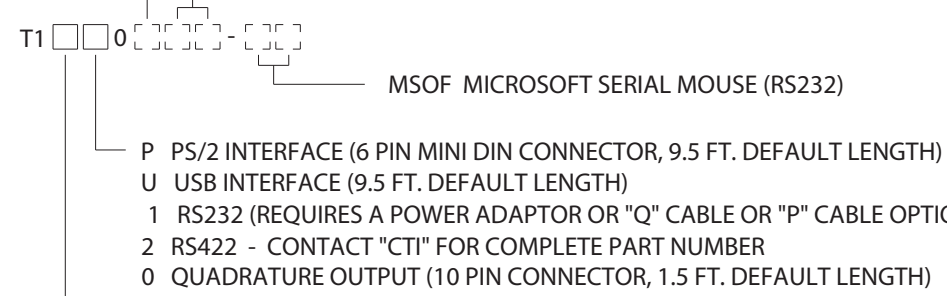

- POWER OPTION
- 0 STANDARD
- 1 OPTIONAL RS232 POWER ADAPTOR CABLE

10 PIN SOCKET
PINS ON .1 CENTERS

28 AWG RIBBON CABLE

1	2
3	4
5	6
7	8
9	10

CUSTOMER PC BOARD HEADER

PIN	FUNCTION	COLOR
1	Y _B	BROWN
2	COMMON	RED
3	+5V	ORANGE
4	Y _A	YELLOW
5	—	GREEN
6	—	BLUE
7	X _A	VIOLET
8	+5V	GRAY
9	COMMON	WHITE
10	X _B	BLACK

OUTPUT WAVEFORMS
"POSITIVE DIRECTION SHOWN"

X_A

X_B

FOR T1000 "ONLY"

CTI ELECTRONICS CORPORATION
 110 Old South Ave., Stratford, CT 06615 - Tel 203 / 386-9779 - Fax 203 / 378-4986 - www.ctielectronics.com

TITLE: **MODEL T1XX0 SERIES
2.0" DIA. TRACKBALL**

REV. G DATE: 11-20-07

APPROVED: DRAWN: SJS

B 761128