

STANDARDS AND ENVIRONMENTAL SPECIFICATIONS

TEMPERATURE RANGE: -40°C TO +80°C
 SEALING RATING: NEMA 4/4X (IP66), PCB HAS CONFORMAL COATING
 STANDARDS: CE, ROHS AND FCC CLASS B COMPLIANT
 POWER: 25mA @ 5V TYPICAL NON-BACKLIT
 100mA @ 5V MAXIMUM BACKLIT

CTI ELECTRONICS CORPORATION
 WWW.CTIELECTRONICS.COM

uCTI-Pod™
UNIVERSAL INDUSTRIAL JOYSTICK CONTROLLER
NEMA 4X IP66, M7XUX-N33 USB SERIES

761834

DATE 12-12-14


APPROVED

SHEET 1 OF 3



DRAWN BY PSB

COPYRIGHT CTI ELECTRONICS CORP. 2014
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


2 USB PORTS OPTION

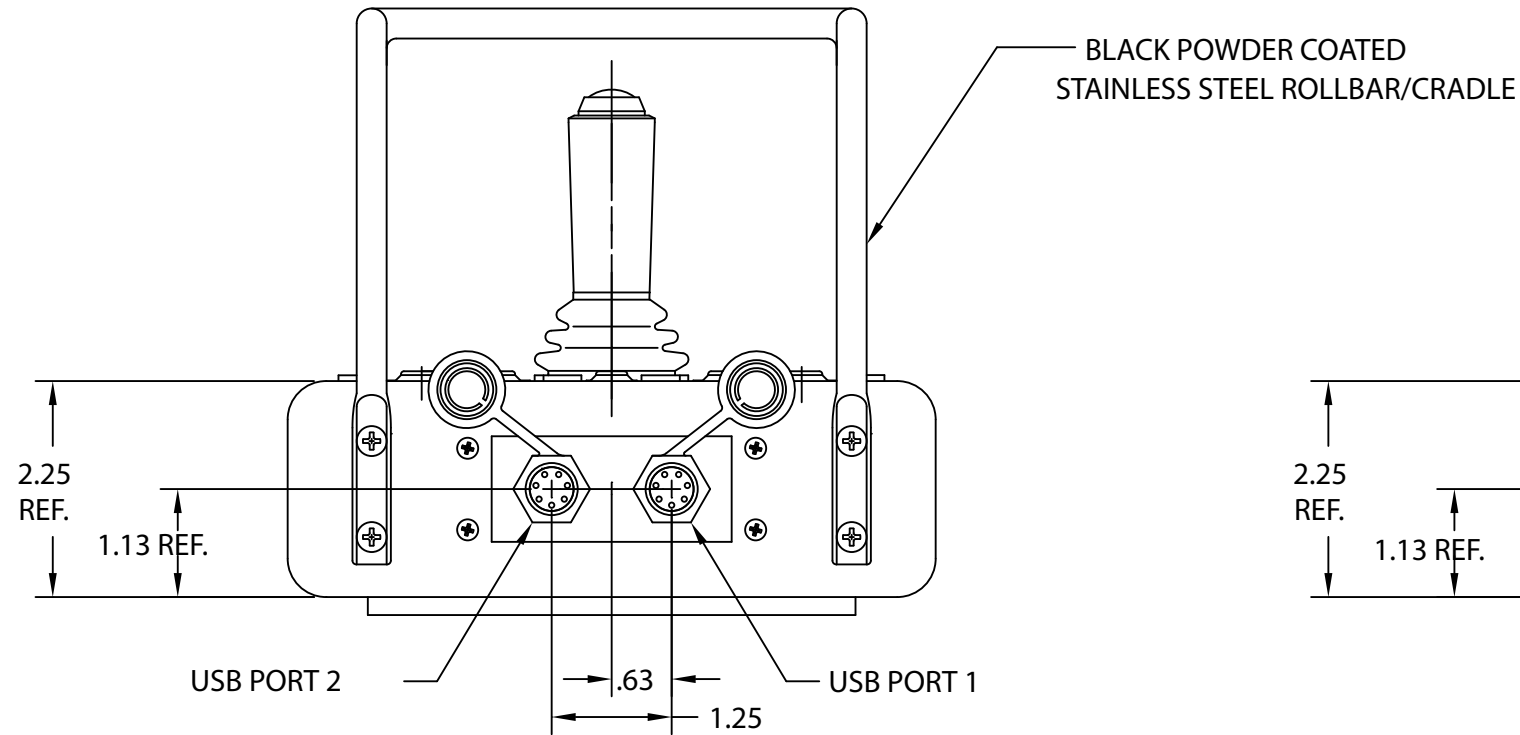

1 USB PORT OPTION

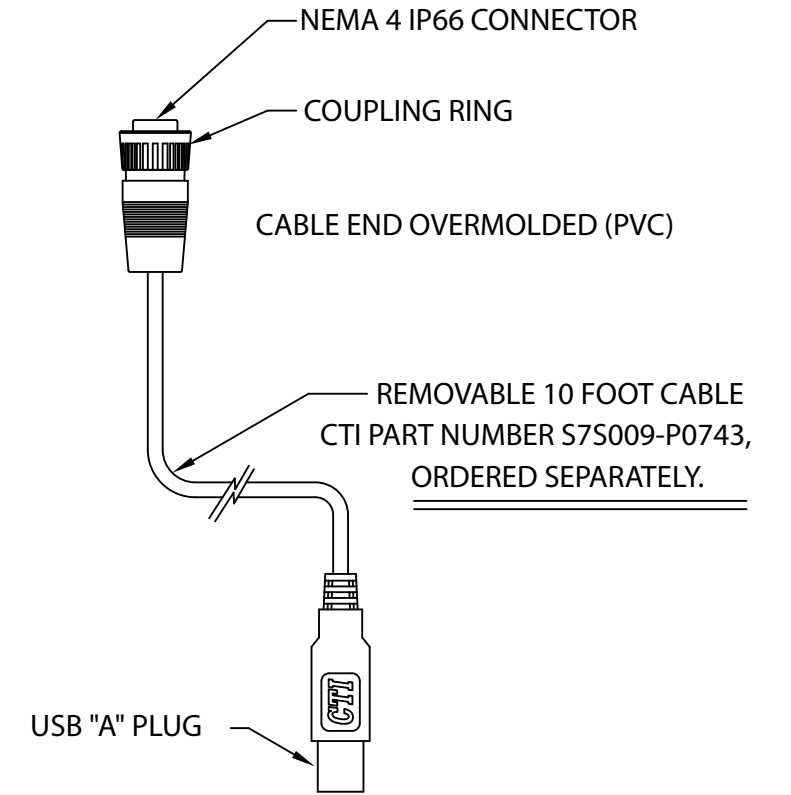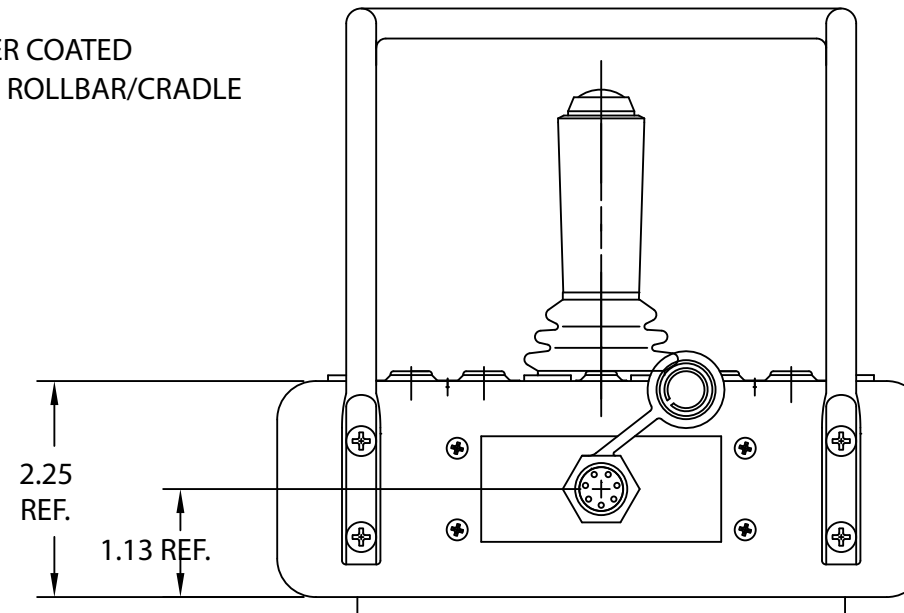

ORDERING INFORMATION:

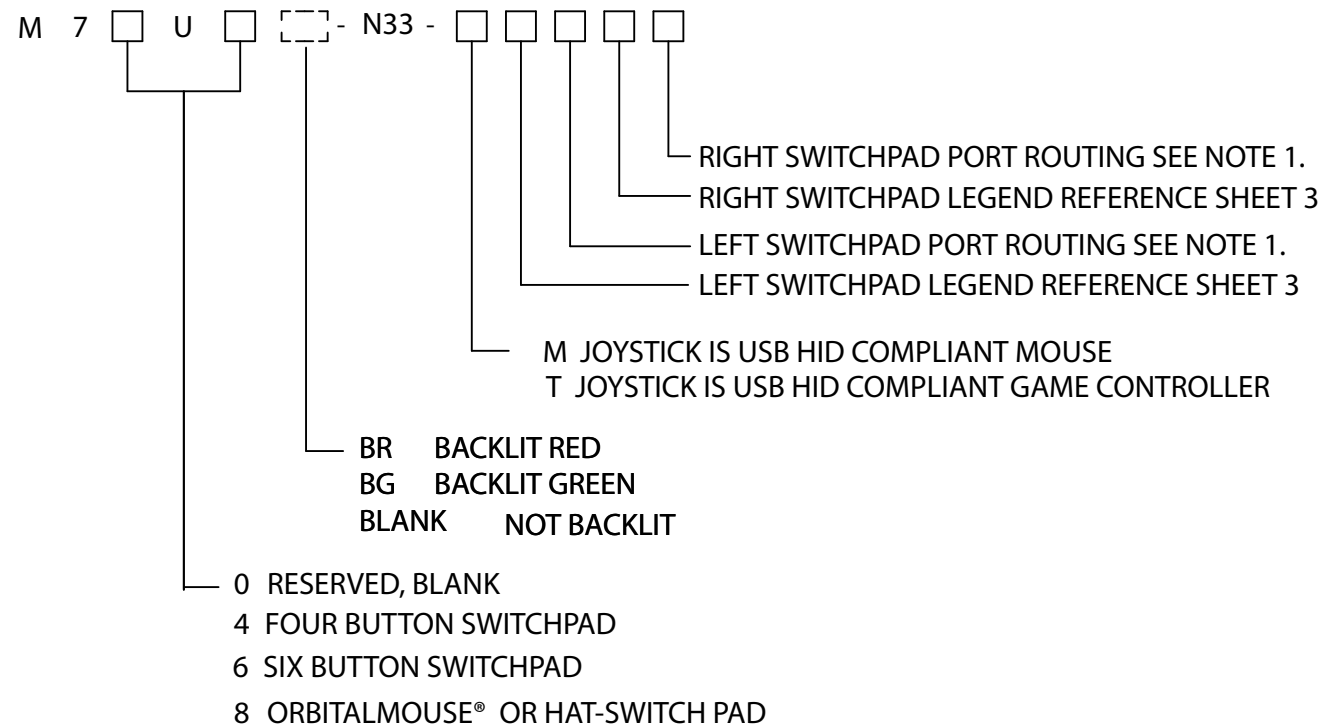

NOTES:

- 1: S FOR SINGLE USB PORT OPTION. FOR TWO USB PORTS, 1 OR 2 IS THE PORT FOR SELECTED SWITCHPAD
- 2: JOYSTICK FUNCTION IS ALWAYS AVAILABLE ON PORT 1
- 3: DIMENSIONS ARE IN INCHES.
- 4: uCTI-Pod™ AND CTI-Pod™ ARE CTI ELECTRONICS CORP. TRADEMARKS FOR A "UNIVERSAL INDUSTRIAL JOYSTICK CONTROLLER."
- 5: OPERATED UNDER WINDOWS® OS.

CTI ELECTRONICS CORPORATION
WWW.CTIELECTRONICS.COM

uCTI-Pod™
UNIVERSAL INDUSTRIAL JOYSTICK CONTROLLER
NEMA 4X IP66, M7XUX-N33 USB SERIES

761834

DATE 12-12-14


APPROVED

SHEET 2 OF 3


DRAWN BY PSB

COPYRIGHT CTI ELECTRONICS CORP. 2014
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


FOUR BUTTON SWITCHPAD OPTIONS




OPTION #1




OPTION #2




OPTION #3



OPTION #4

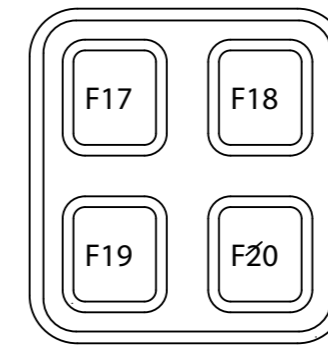


OPTION #5

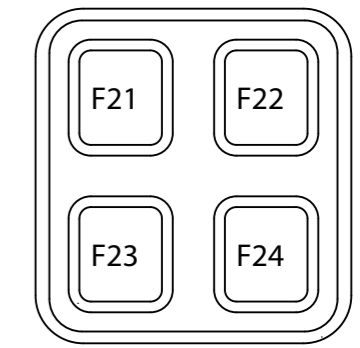


OPTION #6


SIX BUTTON SWITCHPAD OPTIONS




OPTION #1



OPTION #3




OPTION #5




OPTION #6

ORBITALMOUSE® OR HAT-SWITCH OPTIONS



OPTION #0



OPTION #7

CTI ELECTRONICS CORPORATION
WWW.CTIELECTRONICS.COM

uCTI-Pod™
UNIVERSAL INDUSTRIAL JOYSTICK CONTROLLER
NEMA 4X IP66, M7XUX-N33 USB SERIES

761834

DATE 12-12-14

APPROVED

SHEET 3 OF 3

DRAWN BY PSB

COPYRIGHT CTI ELECTRONICS CORP. 2014
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE