



ENCLOSURE IS ALUMINUM, WITH IRIDITE PROTECTIVE COATING AND BLACK POWER COATED FINISH

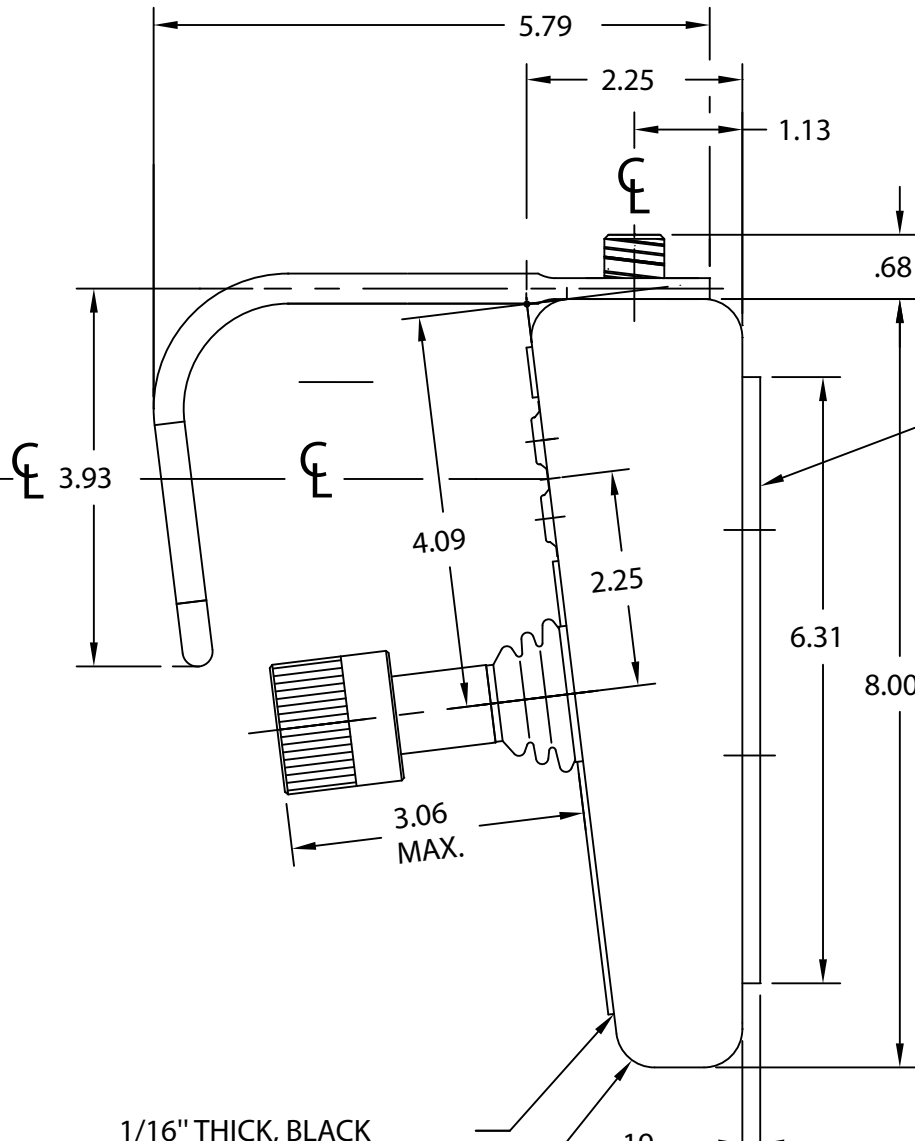

1/16" THICK, BLACK CLOSED-CELL FOAM HANDREST PAD

3/16" THICK, BLACK CLOSED-CELL FOAM BASEPAD

SEALED 8-32 THREADED MOUNTING HOLES (4 PLACES)
 MAXIMUM LENGTH OF SCREW ENGAGEMENT .50
 MINIMUM LENGTH OF SCREW ENGAGEMENT .31
 MEASURED FROM MOUNTING SURFACE

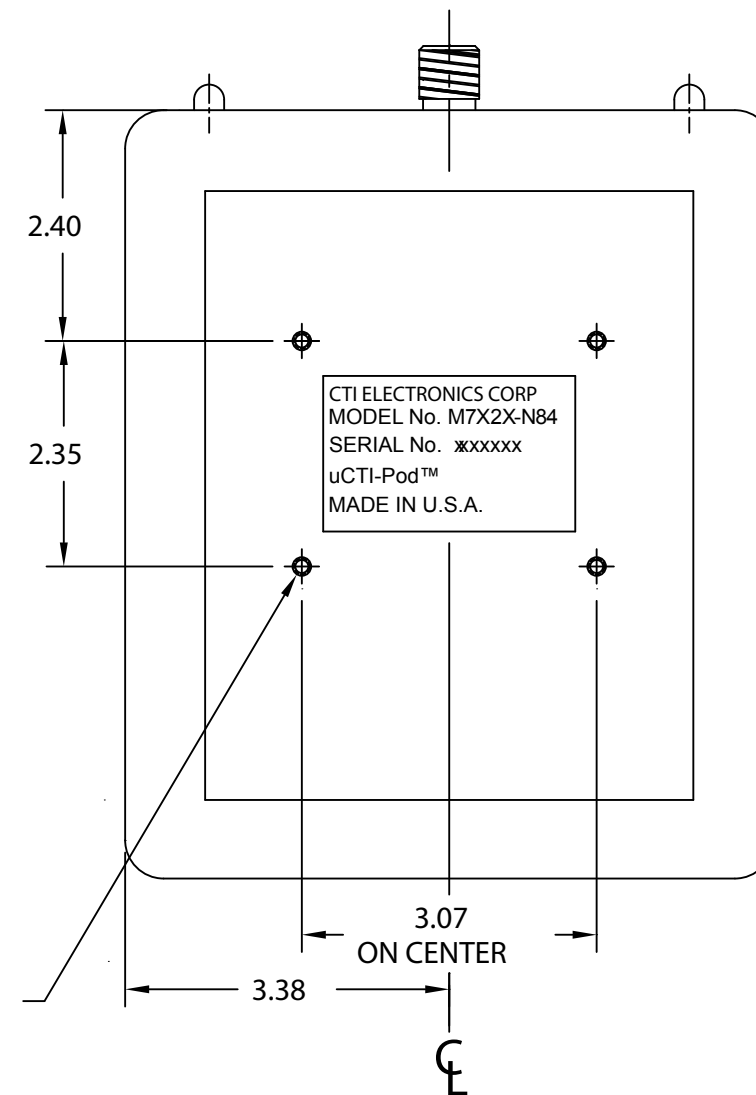

BOTTOM MOUNTING DETAIL

STANDARDS SPECIFICATIONS

TEMPERATURE RANGE: -40°C TO +80°C
 ENVIRONMENTAL RATING: NEMA 4X (IP66), PCB HAS CONFORMAL COATING
 STANDARDS: CE, RoHS AND FCC CLASS B COMPLIANT
 POWER: 100mA @ 5V TYPICAL NON-BACKLIT WITH TERMINATION RESISTOR =100 Ohms
 175mA @ 5V TYPICAL BACKLIT OPTION.
 WEIGHT: 2.LBS 1.OZ APPROXIMATE. (935.5 gms)

CTI ELECTRONICS CORPORATION
 WWW.CTIELECTRONICS.COM

uCTI-Pod™ NEMA 4X IP66
 UNIVERSAL INDUSTRIAL JOYSTICK CONTROLLER
 M7X2X-N84 RS422/RS485 SERIES

761837

DATE 03-04-15


APPROVED

SHEET 1 OF 3


DRAWN BY PSB

COPYRIGHT CTI ELECTRONICS CORP. 2015
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


FOUR BUTTON SWITCHPAD OPTIONS




OPTION #1




OPTION #2




OPTION #3



OPTION #4




OPTION #5




OPTION #6


SIX BUTTON SWITCHPAD OPTIONS




OPTION #1



OPTION #3




OPTION #5




OPTION #6

ORBITALMOUSE® OR HAT-SWITCH OPTIONS



OPTION #0



OPTION #7

CTI ELECTRONICS CORPORATION
 WWW.CTIELECTRONICS.COM

uCTI-Pod™ NEMA 4X IP66
 UNIVERSAL INDUSTRIAL JOYSTICK CONTROLLER
 M7X2X-N84 RS422/RS485 SERIES

761837

DATE 03-04-15

APPROVED

SHEET 3 OF 3

DRAWN BY PSB

COPYRIGHT CTI ELECTRONICS CORP. 2015
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE