

**ORDERING INFORMATION:**

K I 6 8 U    6 - [ ]

OPTIONAL CABLE LENGTH DIMENSION IN 0.5 FOOT INCREMENTS  
(MINIMUM LENGTH IS 1.0 FT, MAXIMUM LENGTH IS 9.5 FT.)  
BLANK [ ] INDICATES, NO CABLE


USB INTERFACE

**SPECIFICATION:**

TEMPERATURE: -40°C TO +80°C  
 SEALING: NEMA 4 (IP66)  
 SHOCK: 40G (N) 11 msec. per MIL-STD-810  
 WEIGHT: KEYBOARD WITH PCB: APPROX. 7 OZ. (198 GRAMS)  
 9.5 FT. CABLE ONLY: APPROX. 2.8 OZ. (80 GRAMS)  
 STANDARD: CE, ROHS, REACH, FCC CLASS B  
 PATENTS: 7,499,032

NOTE: DIMENSIONS ARE IN INCHES    MILLIMETERS

<b>CTI ELECTRONICS CORPORATION</b> WWW.CTIELECTRONICS.COM	
<b>KI68U6 SERIES NEMA 4 (IP66)</b> <b>USB MEDICAL/CLEANROOM</b> <b>OEM KEYBOARD</b>	
<b>761872</b>	
APPROVED	DATE 12-03-15 DRAWN BY PSB
SHEET 1 OF 2 COPYRIGHT 2015 CTI ELECTRONICS CORP. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE	

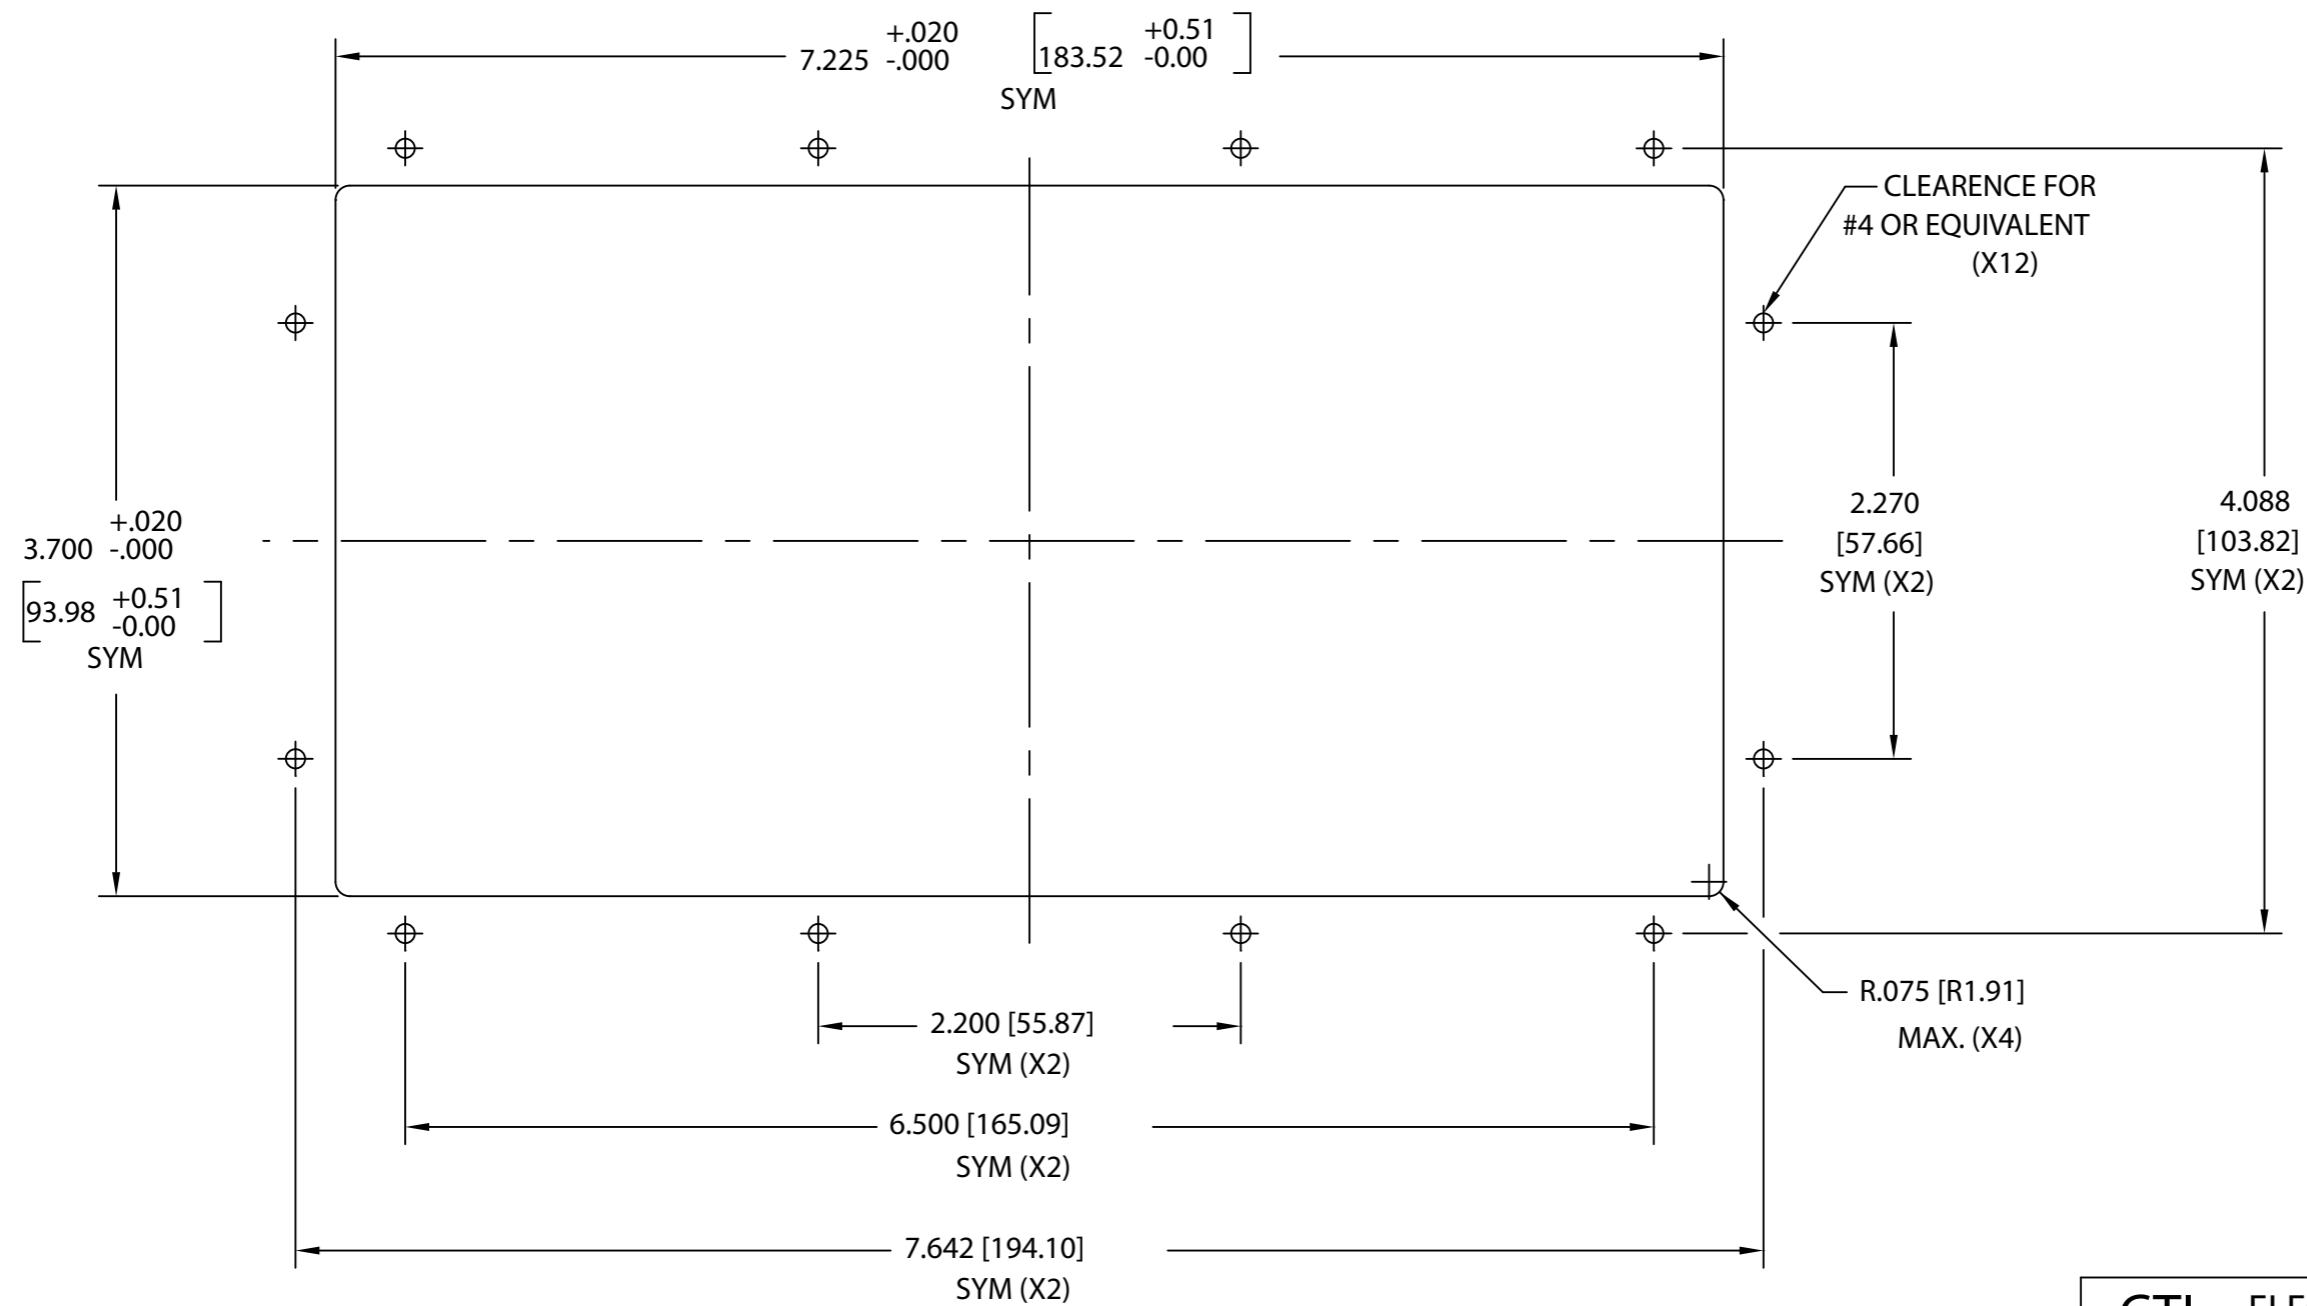

### MOUNTING DETAILS

NOTES:

1. DEBURR ALL EDGES
2. USE #4 [3.mm] STAINLESS HARDWARE FOR MOUNTING.
3. TAKE 'ESD' PRECAUTIONS DURING INSTALLATION AS ELECTRONIC COMPONENTS ARE EXPOSED.
4. DIMENSIONS ARE IN INCHES      MILLIMETERS

<b>CTI</b> ELECTRONICS CORPORATION	
WWW.CTIELECTRONICS.COM	
KI68U6 SERIES NEMA 4 (IP66) USB MEDICAL/CLEANROOM OEM KEYBOARD	
<b>761872</b>	
APPROVED	DATE 12-03-15 DRAWN BY PSB
SHEET 2 OF 2	
COPYRIGHT 2015 CTI ELECTRONICS CORP. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE	