

SPECIFICATIONS

TEMPERATURE: -40°C TO +80°C
 SEALING: NEMA 4 (IP66) WITH N84 KNOB, OTHERWISE NEMA 12 (IP54)
 WEIGHT:
 STANDARD: CE, RoHS, REACH, FCC CLASS B

USB HID COMPLIANT GAME CONTROL DEVICE (9.5 FT. DEFAULT CABLE LENGTH)

- 4 BLACK ELASTOMER OPTIONAL
- 9 GRAY ELASTOMER



Z CONFORMAL COATING ON INTERFACE PCB
 RF OPTIONAL CONDUCTIVE BOOT AND FERRITE BEAD
 G MAXIMUM COMPRESSION SPRING (N82 AND N8A ONLY)

[W1] THRU [W5] INDICATES OPTIONAL BULKHEAD CONNECTOR, 1 THRU 5 FOOT CABLE LENGTH IN 1 FT. INCREMENTS. (MATING CABLE INCLUDED)

- 2 N82 BLACK DELRIN KNOB SMOOTH FINISH
- A N82 ANODIZED BLACK ALUMINUM KNOB WITH FINE STRAIGHT KNURL
- 4 N84 BLACK DELRIN KNOB STRAIGHT KNURL

M 2 0 U [] T [] - [] - N 8 []

ORDERING INFORMATION:

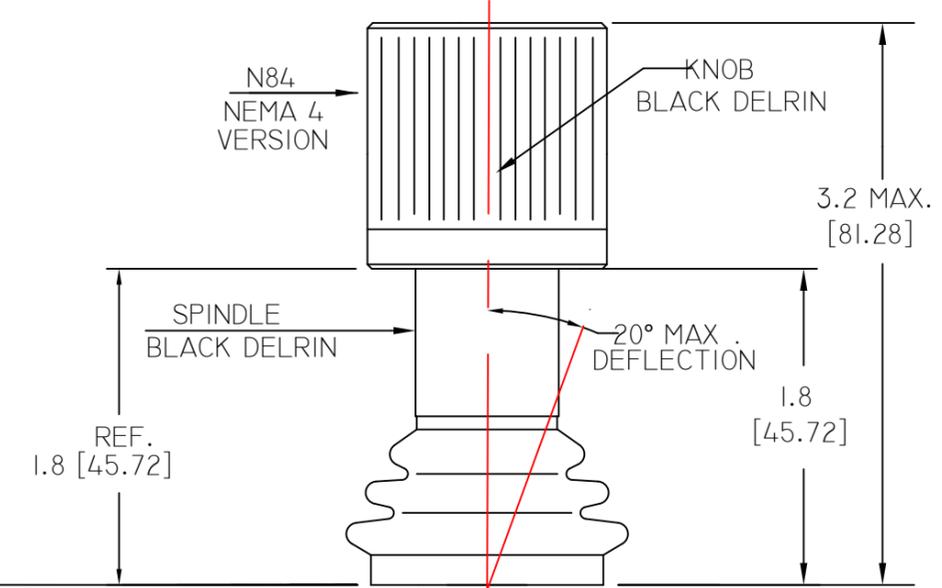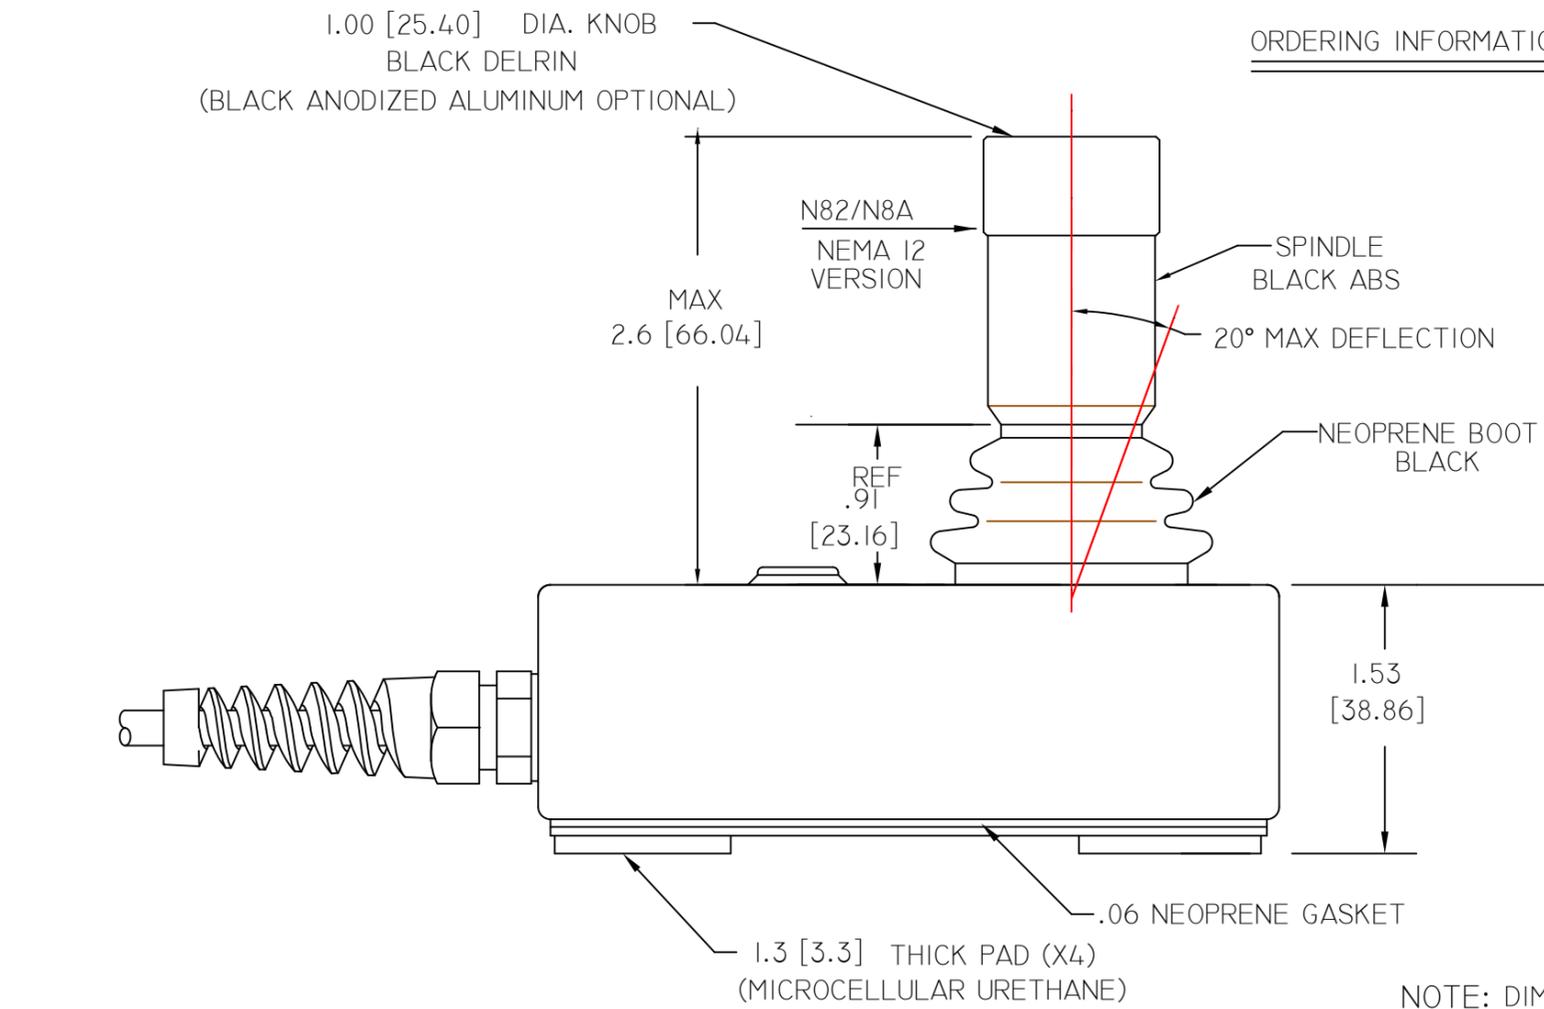

CTI ELECTRONICS WWW.CTIELECTRONICS.COM		
NEMA 4 (IP66)/NEMA 12 (IP54) INDUSTRIAL HAND HELD 3 AXES USB FLIGHTSTICK M20U9T-N8X SERIES		
761876		DATE 04-04-18
APPROVED	SHEET 1 OF 1	DRAWN BY PSB
COPYRIGHT 2018 CTI ELECTRONICS SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE		

NOTE: DIMENSIONS ARE IN INCHES [MILLIMETERS]