

## KP6000 SERIES INDUSTRIAL USB KEYPAD

The KP6000 Series industrial USB keypad assembly offers six momentary pushbuttons with predefined function codes, as specified within the USB Specification Standard. A single key press or keystroke provides a unique code to the computer operating system via the USB HID Compliant Keyboard Device Driver. This unique code is accessible via the application programming Interface libraries (a set of routines) for the Software Application Developer to use for extending the capability or functionality of a software application. Computer operating systems (Windows OS®, Mac OS X®, Linux OS, SunOS®, etc.) or the System Software Applications (programs) typically use the Function 1 (F1) through Function 12 (F12) keys but most have not taken advantage of the Function 13 (F13) through Function 24 (F24) keys.

These miniature USB keypads are comprised of molded silicone rubber with an o-ring to provide a NEMA 4 (IP66) watertight sealing protection. The silicone rubber elastomer is SYN-Proof™ coated with specially formulated polyurethane for protection against harsh oils and solvents, ensuring 10,000,000+cycles. Key travel is a 2mm stroke which provides excellent tactile response. The use of hard carbon pill contacts molded into the silicone rubber contacting a thick layer of hard gold plated onto the printed circuit board ensures a durability rating over 10,000,000 actuations at 5VDC, 50mA. The electronics components are conformal coated to protect against moisture due to condensation or humidity.

This design ensures years of reliable service and durability across a broad operating temperature range of -40°C to +80°C (-40°F to +176°F). These miniature USB keypads measure 1.8 inches by 1.9 inches and require less than 0.5 inches of below panel depth. Optional backlighting or custom laser etched legends are available to Original Equipment Manufacturers (OEMs).



• Pictured with F13 – F18 Legend, F19-F24 Legend also Available

### KP6000 STANDARD FEATURES

- 6-Button OEM Keypad
- Supports USB 1.1, 2.0, 3.1 Specification Standards
- SynProof™ Coating resists most hazardous chemicals and oils
- Molded rubber elastomer keys rated for 10 million cycles
- Hard carbon pills molded into rubber elastomer guarantees durability
- Keys: 2mm travel provides excellent tactile feedback
- @Y[ YbXg UFY ~UgYfYHWX YX UbX fUbgj Wbkh \jWk ` ~Y`ja ]bUWgk YUF ]ggi Yg`
- Conformal Coating of PCB protects against condensation or humidity
- Optional Backlighting: Red or Green LED
- Optional USB Cable with standard "A" Plug.
- Optional Parylene coating offers the toughest molecular barrier protection
- Optional customized legends or elastomer color
- Made in the USA

### KP6000 SERIES MANUFACTURING OPTIONS


1	Keypad Legend F13 – F18 (HEX Codes 68, 69, 6A, 6B, 6C, 6D)
3	Keypad Legend F19 – F24 (HEX Codes 6E, 6F, 70, 71, 72, 73)
BR	Red LED Backlight
BG	Green LED Backlight
X.X	Optional Hardwired USB Cable, Minimum 1.0 ft, Maximum 9.5 ft, in 0.5 ft Increments

\*For complete ordering information please refer to [Technical Drawing 761832](#)

### KP6000 SERIES USB CABLE OPTIONS

P4S003X [Hardwired USB Cable for USB Keypad](#) P4S005 [Removable USB Cable for USB Keypad](#)

### KP6000 TECHNICAL DRAWING

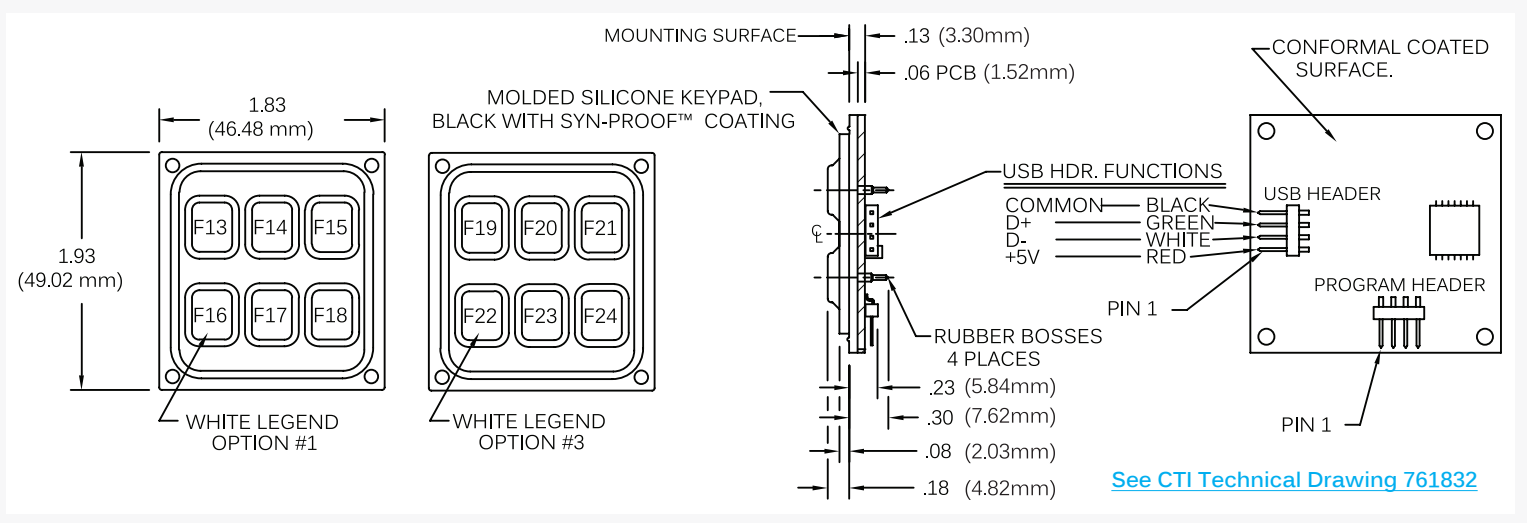

See [CTI Technical Drawing 761832](#)



# KP6000

OEM USB KEYPAD

## OPERATING SYSTEM SPECIFICATION

Operating System	all Windows OS® with USB HID Compliant Ports
	All others are Indeterminate

## ELECTRICAL SPECIFICATION

Power Consumption	Non-Backlit	@ 5VDC, < 10mA
	Backlit	@ 5VDC, < 50mA

## MECHANICAL SPECIFICATION

KP6000 Dimensions	Width: 1.83" (46.48mm)	Height: 1.93" (49.02mm)	Below Panel: 0.30" (7.62mm)			
	Key Travel	0.08" (2mm)	Key Cap Size	Width: 0.33" (8.38mm)   Height: 0.41" (10.41mm)		
Keys	6 Silicone Rubber Keys with carbon pills		Actuation Force: 100g +/- 20g			
MTBF	Greater than 100,000 hours (Hard gold plating)					
Life Expectancy	5VDC @ 50mA is 10,000,000+ activations					
	SynProof Coated Elastomer is 10,000,000+ cycles		Parylene Coated Elastomer is 10,000,000+ cycles (Option)			
Shock	Peak Value	30-50g	Peak Duration	11ms	Waveform	Half Sine
Vibration	Frequency / Displacement		5-25 Hz / 0.1"	25-55 Hz / 0.03"		

## ENVIRONMENTAL SPECIFICATION

	Standard	Optional
Operating Temperature	-40° to 80° C / -40° to 176° F	
Storage Temperature	-40° to 80° C / -40° to 176° F	
Relative Humidity	100% (properly installed)	
Sealing Rating	NEMA 4 (IP66) Watertight (properly installed)	
Elastomer Coating	SynProof™ Coating	Parylene Coating
PCB Coating	Conformal Coating	

## CONFORMANCE / CERTIFICATIONS / COMPLIANCE

subject to manufacturing options applied

U.S.A. Standards	U.S. FCC 47 CFR 15 Class A & B	RF Emissions Compliant 8Kv (Contact), 15Kv (Air)
	MIL-STD-461F	Radiated Emissions and Susceptibility Conformance
	MIL-STD-810G	Protection against humidity, fungus, and salt spray Conformance
	MIL-STD-901D	Protection against shock Conformance
	MIL-STD-167-1	Protection against vibration Conformance
	MIL-STD-1472G	Human Factors Conformance
	MIL-I-45208	Quality System Conformance
	IPC-A-610	Acceptability of Electronics Assemblies Certification
European Standards	"CE" Compliant	
	Restriction of Hazardous Substance (RoHS) Directive Compliant	
	Regulation on Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) Directive Compliant	
International Standards	IEC 61000-4-2 and EN61000-4-2	ESD 8Kv contact and 15Kv air Conformance
	IEC 61000-4-3 and EN61000-4-3	Radiated Emissions and Susceptibility Conformance
	IEC 61000-6-3 and EN61000-6-3	Electromagnetic Compatibility Conformance
	IEC 60601-1 and EN60601-1	Medical Device Design and Manufacture Conformance
	IEC 62353 and BS EN62353	Medical Device Recurrent Testing Conformance

## KP6000 STANDARDS

CTIs USB keypads are ruggedized to meet aerospace, marine, medical, and military standards. When properly installed these USB keypads can meet MIL-STD-167-1 (protection against vibration), MIL-STD-901D (protection against shock), MIL-STD-461F (protection against high EMI/RFI levels), MIL-STD-810G (protection against humidity, fungus, and salt spray), and MIL-HDBK-217F (MTBF is greater than 100,000 hours) as well as other international standards.

## COPYRIGHT ACKNOWLEDGEMENTS

Windows OS® is a Microsoft Corporation, Mac OS X® is an Apple Computer, SunOS® is a Sun Microsystems Corporation