


ORDERING INFORMATION:

- I STANDARD QWERTY (IBM)
- C SUN LEGEND


- 0 GRAY ELASTOMER
- 1 GRAY ELASTOMER WITH SYN-PROOF COATING™
- 4 BLACK ELASTOMER WITH SYN-PROOF COATING™
- 5 BLACK ELASTOMER

OPTIONAL CABLE LENGTH DIMENSION IN 0.5 FOOT INCREMENTS
 BLANK [] INDICATES, NO CABLE

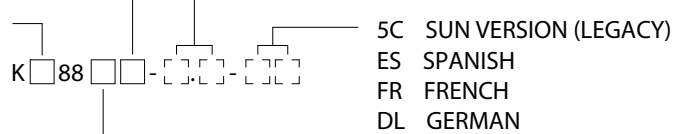

- P PS/2 INTERFACE (6 PIN MINI DIN CONNECTOR, 9.5 FT. DEFAULT LENGTH)
- T "AT" INTERFACE (5 PIN CIRCULAR DIN CONNECTOR, 6.0 FT. DEFAULT LENGTH)
- U USB INTERFACE (9.5 FT. DEFAULT LENGTH)
- S SUN INTERFACE (8 PIN MINI DIN CONNECTOR, 6.0 FT. DEFAULT LENGTH) (LEGACY)

CTI ELECTRONICS CORPORATION	
110 Old South Ave., Stratford, CT 06615 - Tel 203 / 386-9779 - Fax 203 / 378-4986 - www.ctielectronics.com	
TITLE: SUBASSEMBLY KX88XX SERIES	
REV. DATE: 09-07-04	B701672
APPROVED: VI / SJS	
1 OF 2	

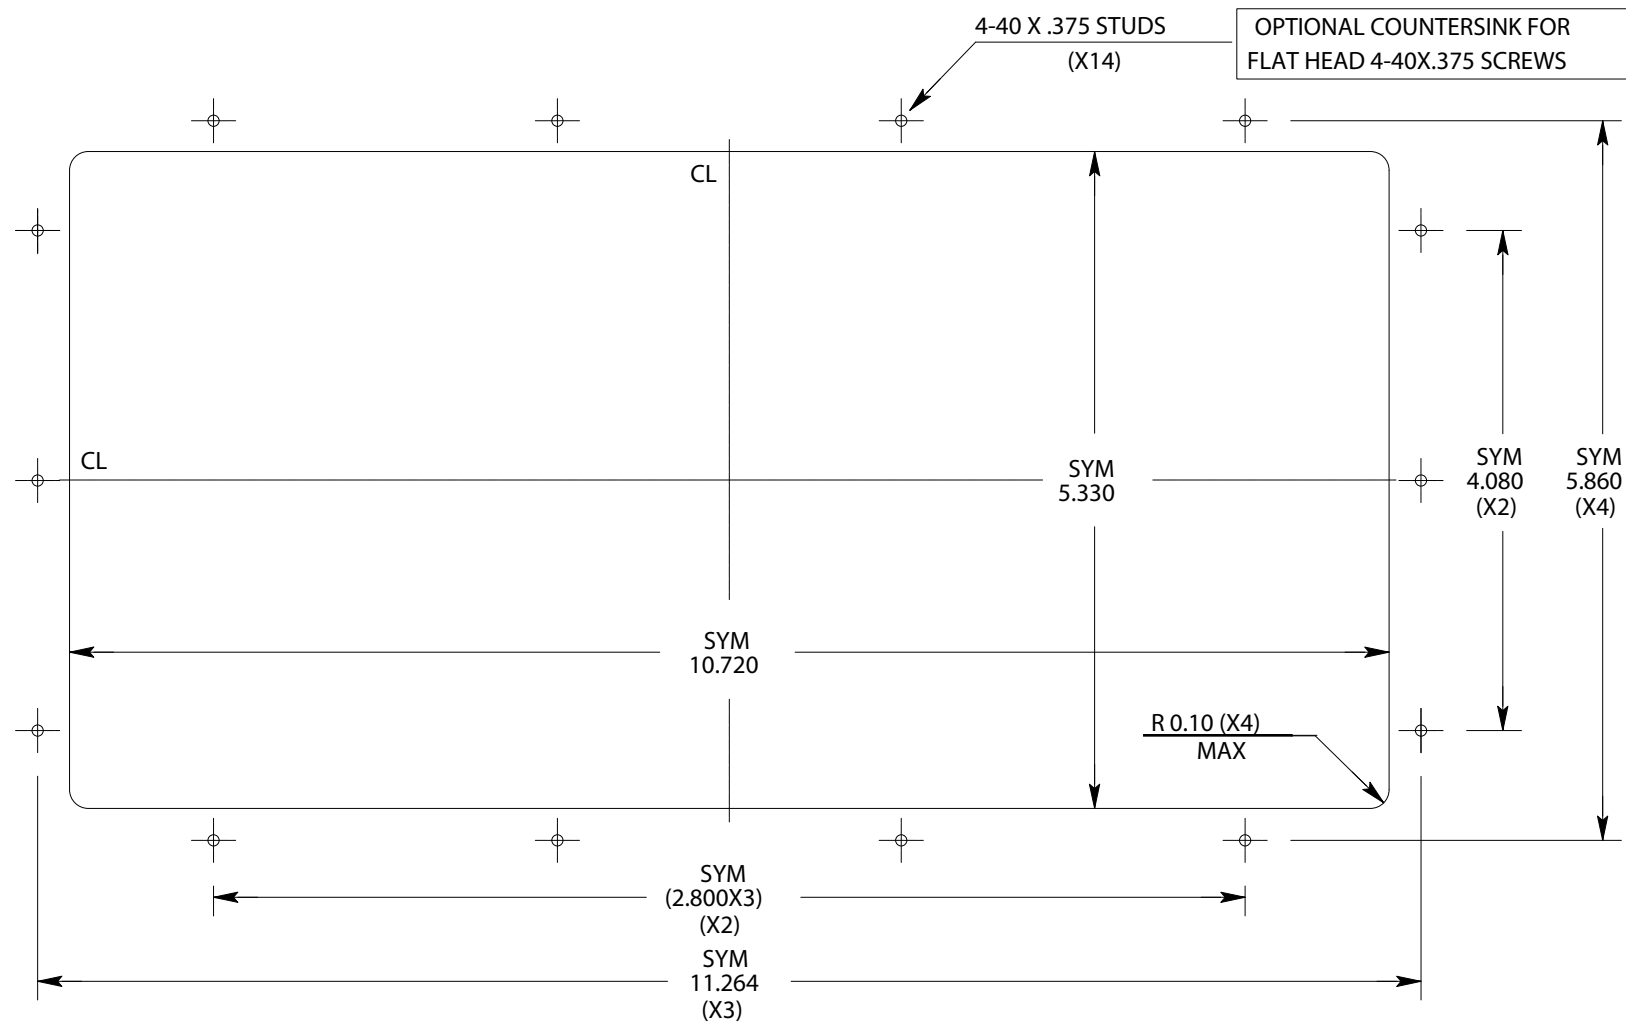

NOTES:

1. DEBURR EDGES
2. USE STAINLESS HARDWARE FOR MOUNTING
4-40 HEX NUTS (X16)
3. IT IS RECOMMENDED THAT RTV SEALANT BE
USED AT JOINTS FOR SEVERE INSTALLATIONS

CTI ELECTRONICS CORPORATION		110 Old South Ave., Stratford, CT 06615 - Tel 203 / 386-9779 - Fax 203 / 378-4986 - www.ctielectronics.com	
TITLE: SUBASSEMBLY KX88XX SERIES			
REV. C	DATE:	09-07-04	
APPROVED:	DRAWN:	VI / SJS	
B701672			2 OF 2