

- P PS/2 INTERFACE (6 PIN MINI DIN CONNECTOR, 9.5 FT. DEFAULT LENGTH)
- U USB INTERFACE (9.5 FT. DEFAULT LENGTH)
- 1 RS232 REF: DRAWING 811610 CABLE OPTION, 6.0 FT. DEFAULT LENGTH
- 2 RS422/RS485 (CUSTOM PART No.)

USE ONLY IF POWER OPTION IS "0"
Q RS232 OPTIONAL CABLE REF. 811610 (CUSTOM CABLE LEGACY ONLY)


- DZ LOW TEMPERATURE (-25°C TO 80°C) & CONFORMAL COATING (ENCODER PCB'S)
- Z CONFORMAL COATING (ENCODER PCB'S)
- V STANDARD VIBRATION DAMPENING
- V1 LIGHT VIBRATION DAMPENING
- G1 OPTIONAL SHALLOW COVER (LEGACY)

- 2B 2 BUTTON PS/2 MOUSE (LEGACY)
- 3B OR BLANK 3 BUTTON PS/2 MOUSE (DEFAULT)
- MSOF MICROSOFT SERIAL MOUSE (RS232 LEGACY)

ORDERING INFORMATION:

POWER OPTION
0 STANDARD

1 OPTIONAL RS232 POWER ADAPTOR CABLE



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

CTI ELECTRONICS CORPORATION
WWW.CTIELECTRONICS.COM


NEMA 12 (IP54) PANEL MOUNT
INDUSTRIAL TRACKBALL 2.0" DIAMETER
T1003 SERIES

761662


SHEET 1 OF 2
DATE 10-08-13

REV. G
DRAWN BY
SJS/PSB

APPROVED

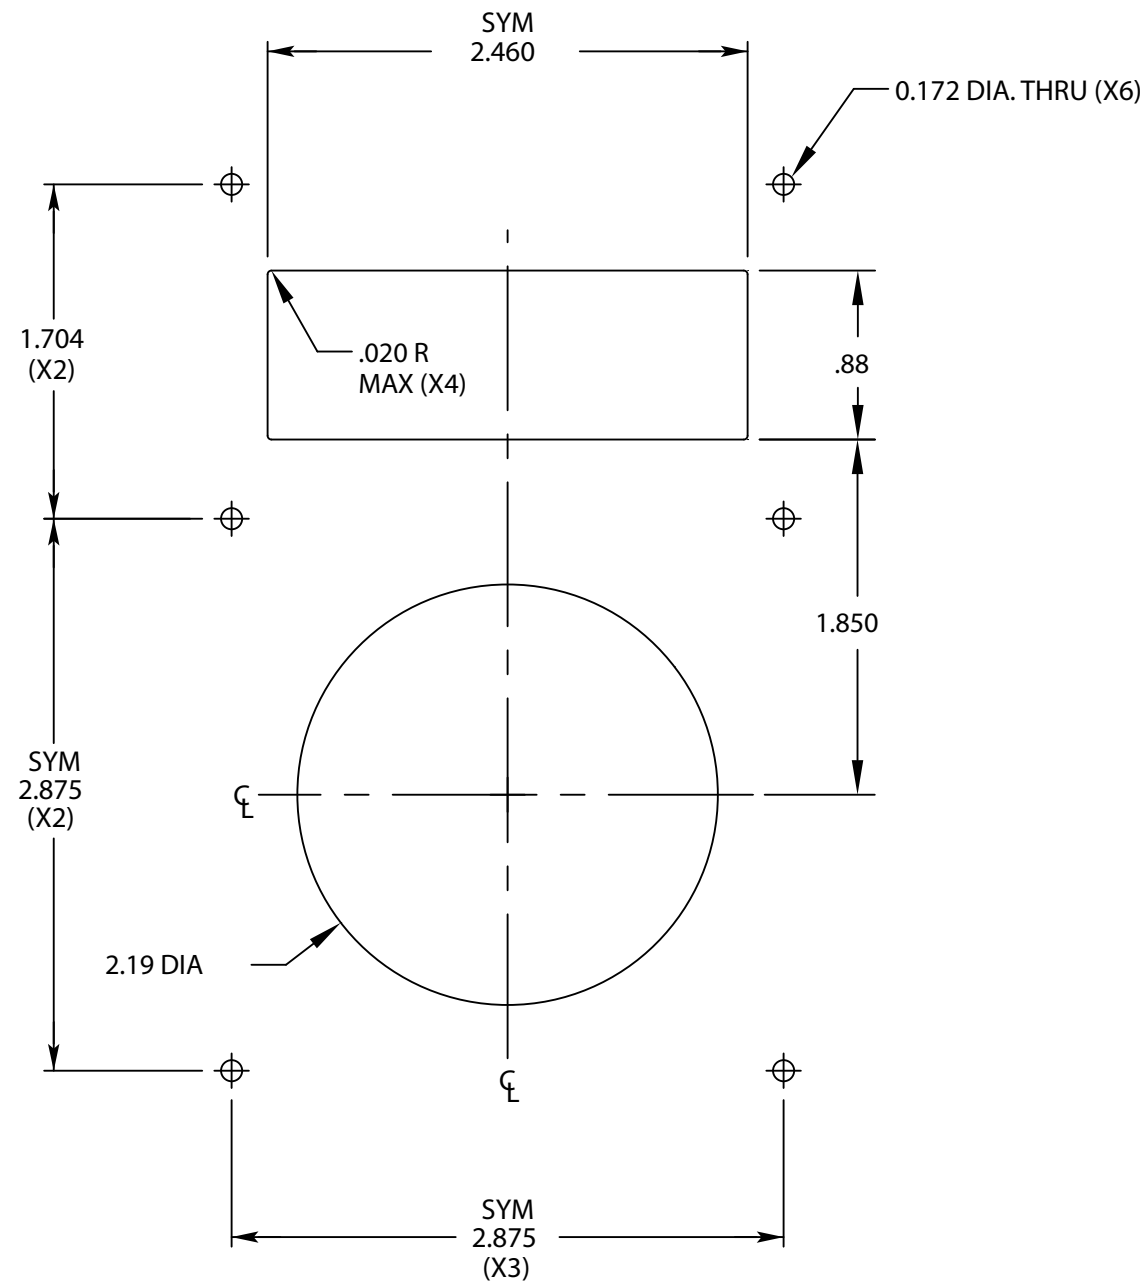

PANEL CUTOUT DETAIL

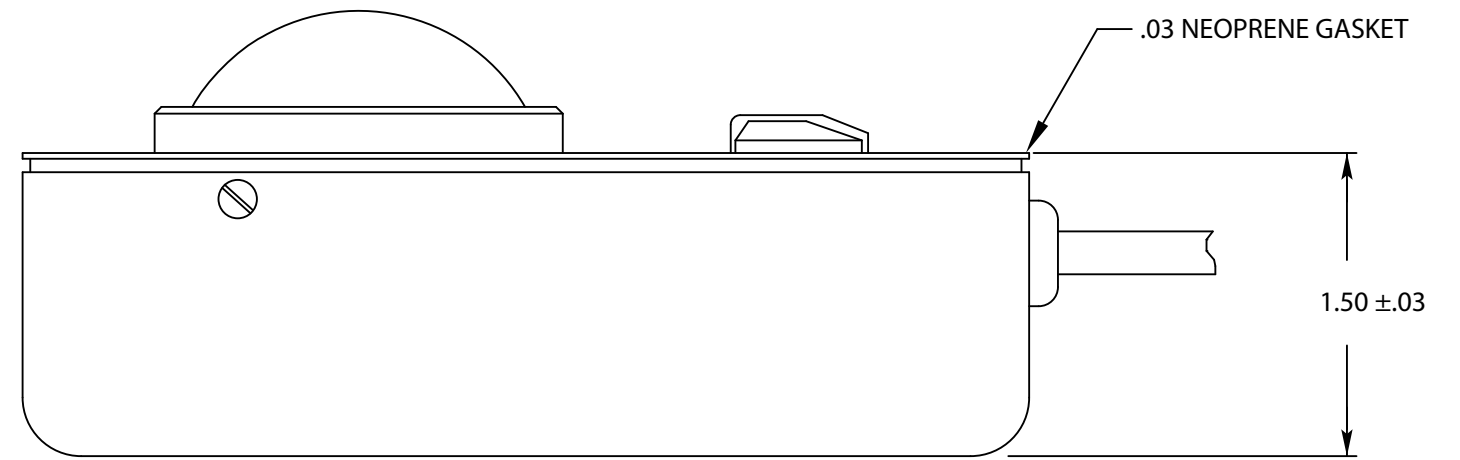

OPTIONAL SHALLOW COVER
MODEL T1XX3G1 (SPECIAL ORDER)

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

CTI <u>ELECTRONICS CORPORATION</u> WWW.CTIELECTRONICS.COM	
NEMA 12 (IP54) PANEL MOUNT INDUSTRIAL TRACKBALL 2.0" DIAMETER T1003 SERIES	
761662	
APPROVED	SHEET 2 OF 2 DATE 10-08-13
	REV.G DRAWN BY SJS/PSB