


**ENVIRONMENTAL SPECIFICATIONS**

TEMPERATURE: 40°C TO +80°C  
 SHOCK: 40 GN, @ 11 MSEC.  
 MIL-STD-810  
 SEALING: NEMA 4/4X IP66  
 WEIGHT: ALUMINUM: 1 lb. 8 oz  
 STAINLESS STEEL: 2 lb. 10 oz  
 USB VERSION IS ROHS COMPLIANT.

**ORDERING INFORMATION:**

- 0 GRAY ELASTOMER (LEGACY)
- 1 GRAY ELASTOMER SYN-PROOF™ COATING (LEGACY)
- 4 BLACK ELASTOMER SYN-PROOF™ COATING

INDICATES OPTIONAL BULKHEAD CONNECTOR  
 THRU 5 INDICATES BULKHEAD CABLE LENGTH IN 1 FT. INCREMENTS  
 BLANK INDICATES DEFAULT CABLE LENGTH OF 6 FT.

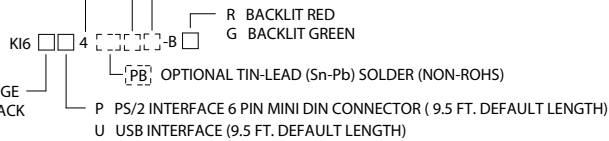

- 0 ALUMINUM ENCLOSURE, PAINTED BEIGE
- 4 ALUMINUM ENCLOSURE, PAINTED BLACK
- 6 STAINLESS STEEL ENCLOSURE

R BACKLIT RED  
 G BACKLIT GREEN  
 PB OPTIONAL TIN-LEAD (Sn-Pb) SOLDER (NON-ROHS)  
 P PS/2 INTERFACE 6 PIN MINI DIN CONNECTOR ( 9.5 FT. DEFAULT LENGTH)  
 U USB INTERFACE (9.5 FT. DEFAULT LENGTH)

<b>CTI</b> ELECTRONICS CORPORATION 110 OLD SOUTH AVE, STRATFORD, CT 06615 WWW.CTIELECTRONICS.COM	
NEMA 4/4X (IP66) INDUSTRIAL KEYBOARD K16000-BACKLIT SERIES	
<b>761750</b> SHEET 1 OF 1	REV. <b>D</b>
APPROVED	DATE 06-25-10
DRAWN S.S./PSB	