B761768-1

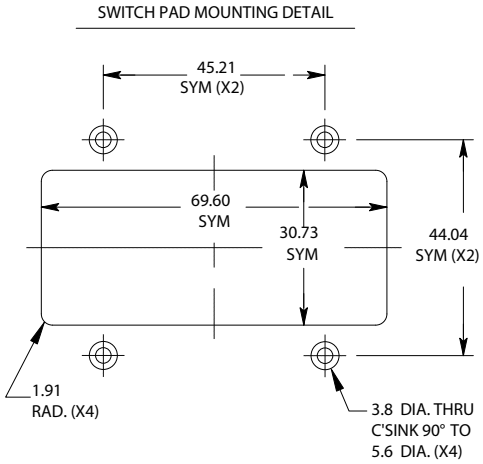

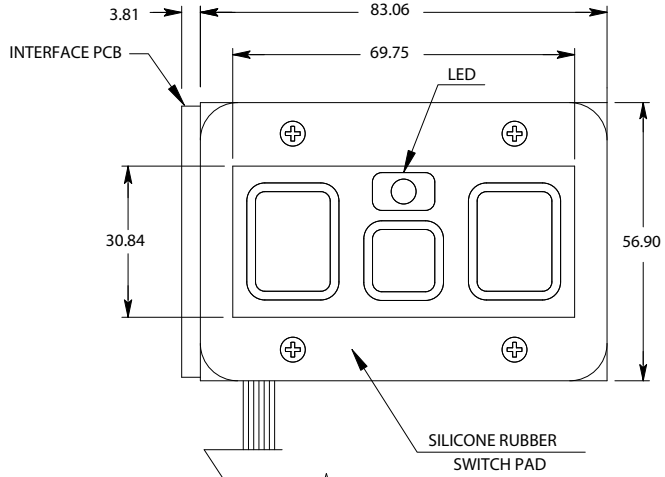

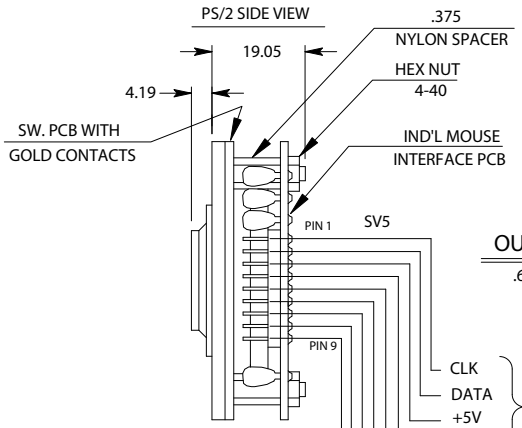

OUTPUT CONNECTOR

.64 SQ. x 2.54 SPACING

CLK	PS/2 MOUSE CABLE
DATA	
+5V	
COMM	
COMM	SERIAL MOUSE CABLE REF 811610
RTS	
TXD	
RXD	
CTS	



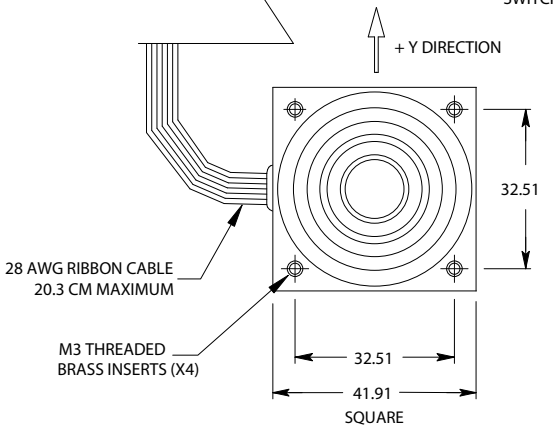

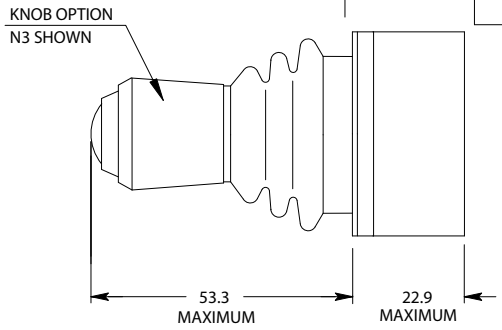



DIMENSIONS ARE IN MILLIMETERS

ORDERING INFORMATION:

F83 □□[ ] - N 3 -[ ].[ ]

- 5 BLACK ELASTOMER
- 9 GRAY ELASTOMER
- BLANK INDICATES NO OPTIONS TO JOYSTICK
- KNOB OPTION (REF DWG. B761252)
- OPTIONAL CABLE LENGTH DIMENSION. IN 0.5 FOOT INCREMENTS (MINIMUM LENGTH IS 1.0 FT, MAXIMUM LENGTH IS 9.5 FT)
  BLANK [ ] INDICATES NO CABLE
- P PS/2 INTERFACE
- U USB INTERFACE
- 1 RS232, (FOR STANDARD SERIAL MOUSE APPEND ``MSOF'') NO CABLE ATTACHED:

	JOYSTICK OPTIONS
G	MAXIMUM COMPRESSION SPRING
Z	CONFORMAL COATING
RF	CONDUCTIVE BOOT AND FERRITE BEAD
D	LOW TEMPERATURE RANGE (-40°C TO +80°C)
N	NEUTRAL SWITCH (AVAILABLE ON +5V MODELS ONLY)
T	FLIGHT STICK PROGRAM USB ONLY (NON-MOUSE)

CTI ELECTRONICS CORPORATION
110 OLD SOUTH AVE, STRATFORD,CT 06615
WWW.CTIELECTRONICS.COM

OEM INDUSTRIAL MOUSE,® OR
USB FLIGHTSTICK F8300-NX SERIES
(METRIC STANDARD)

B 761768-1	REV. J

DRAWN PSB	DATE 01-27-10	SHEET 1 OF 1

B761768-2

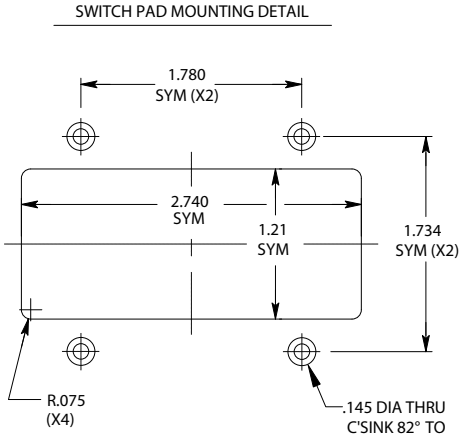

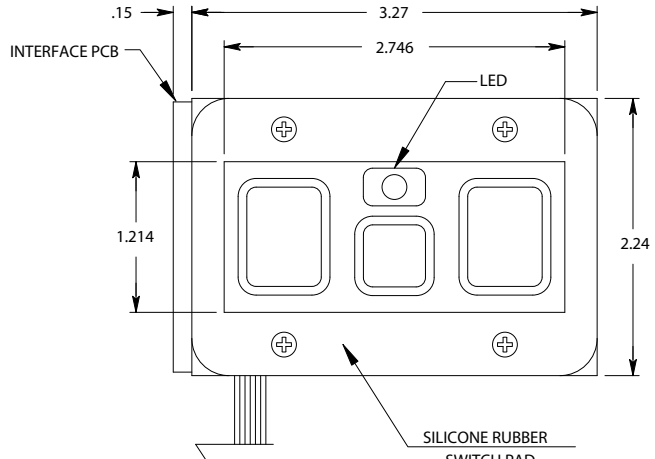

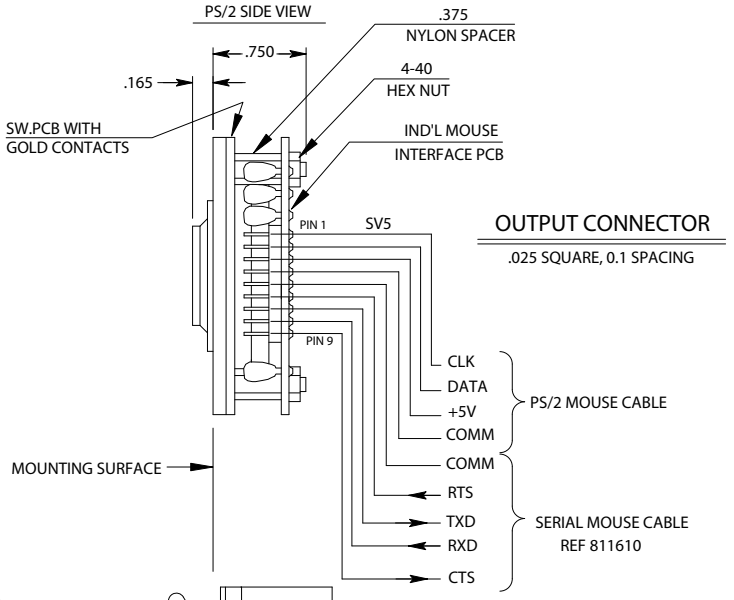

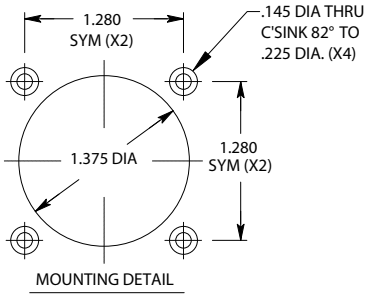

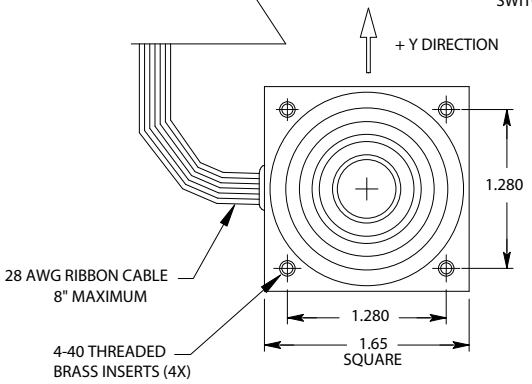

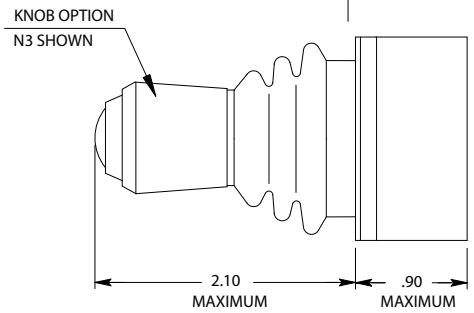



ORDERING INFORMATION:

F80 □□[ ]-N3-[ ][ ]

- 5 BLACK ELASTOMER
  9 GRAY ELASTOMER
- BLANK INDICATES NO OPTIONS TO JOYSTICK
- KNOB OPTION (REF DWG. B761252)
- OPTIONAL CABLE LENGTH DIMENSION. IN 0.5 FOOT INCREMENTS (MINIMUM LENGTH IS 1.0 FT, MAXIMUM LENGTH IS 9.5 FT)
  BLANK [ ] INDICATES NO CABLE
- P PS/2 INTERFACE
  U USB INTERFACE
  .1 . RS232, (FOR STANDARD SERIAL MOUSE APPEND ``MSOF'') NO CABLE ATTACHED:

	JOYSTICK OPTIONS
G	MAXIMUM COMPRESSION SPRING
Z	CONFORMAL COATING
RF	CONDUCTIVE BOOT AND FERRITE BEAD
D	LOW TEMPERATURE RANGE (-40°C TO +80°C)
N	NEUTRAL SWITCH (AVAILABLE ON +5V MODELS ONLY)
T	FLIGHT STICK PROGRAM USB ONLY (NON-MOUSE)

CTI ELECTRONICS CORPORATION
110 OLD SOUTH AVE, STRATFORD,CT 06615
WWW.CTIELECTRONICS.COM

OEM INDUSTRIAL MOUSE,® OR
USB FLIGHTSTICK F8000-NX SERIES
(US STANDARD)

B 761768-2 REV. J

DRAWN PSB	DATE 01-27-10	SHEET 1 OF 1