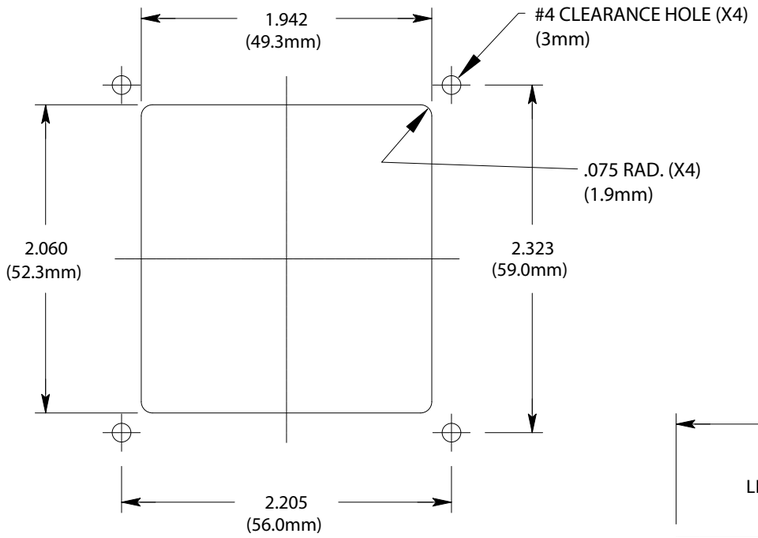

MOUNTING DETAIL

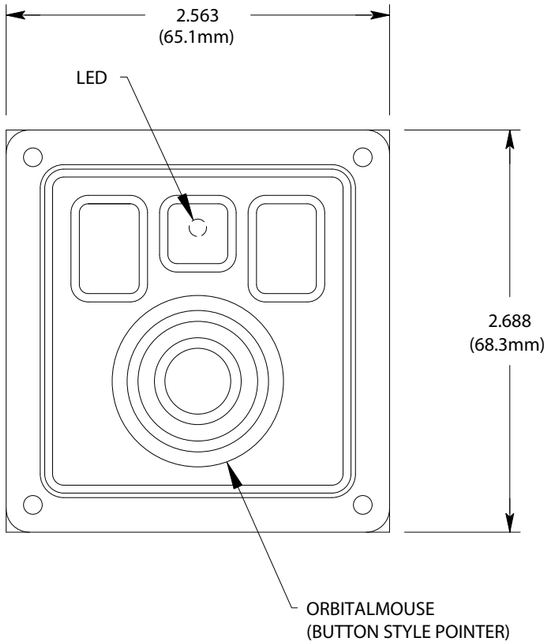

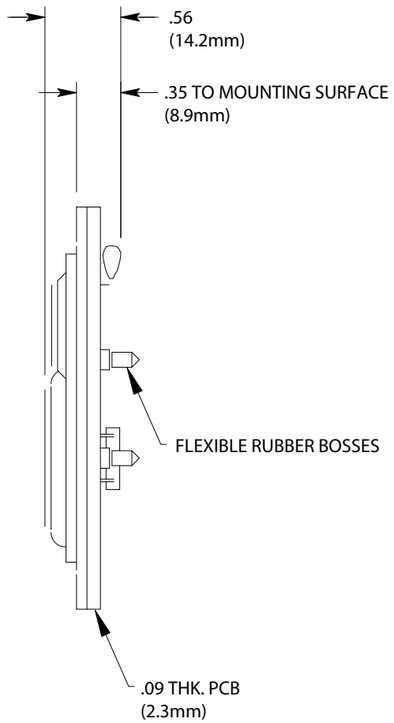

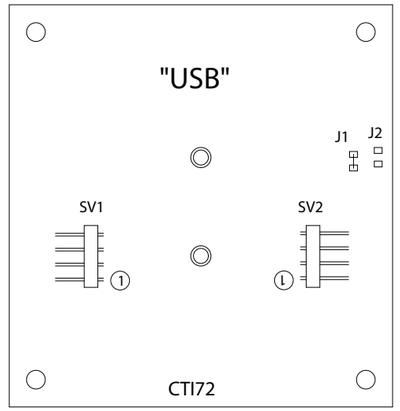

④ COMMON (BLACK)
③ D+ (GREEN)
② D- (WHITE)
① V_{DD} (RED)

ONLY ONE JUMPER OPTION CAN BE USED

J1 ENABLES LEFT SWITCH/LED LATCHING OPTION
J2 ENABLES BACKLIT OPTION

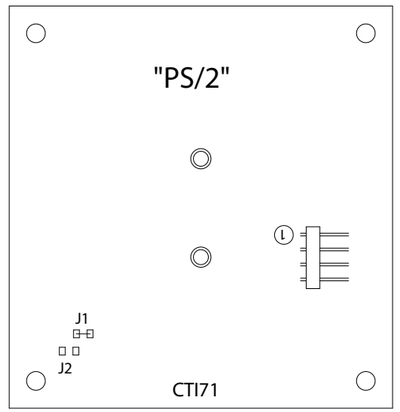

① CLOCK
② DATA
③ +5 VOLTS
④ COMMON

ORDERING INFORMATION:

OM22 □□ - B□ - □.□

9 GRAY ELASTOMER WITH SYN-PROOF™ COATING, 3 SWITCHES, 1 LED AT MIDDLE SWITCH (DEFAULT)
4 BLACK ELASTOMER WITH SYN-PROOF™ COATING, 3 SWITCHES (BACKLIT VERSION)

OPTIONAL CABLE LENGTH DIMENSION IN 0.5 FOOT INCREMENTS
BLANK □.□ INDICATES, NO CABLE

BACK LIGHTING OPTION
BR BACKLIT RED
BG BACKLIT GREEN

P PS/2 INTERFACE (6 PIN MINI DIN CONNECTOR, 9.5 FT. DEFAULT LENGTH)
U USB INTERFACE (9.5 FT. DEFAULT LENGTH)

NOTES:

1. DEBURR ALL EDGES
2. USE #4 (3mm) STAINLESS HARDWARE FOR MOUNTING.
3. TAKE 'ESD' PRECAUTIONS DURING INSTALLATION AS ELECTRONIC COMPONENTS ARE EXPOSED.

CTI ELECTRONICS CORPORATION
110 Old South Ave , Stratford , CT 06615 - Tel 203 / 386-9779 - Fax 203 / 378-4986 - www.ctielectronics.com

TITLE:
ORBITALMOUSE™ WITH 3 BUTTONS
(OEM VERSION) MODEL OM22XX SERIES

REV. D DATE: 06-08-06
APPROVED:
DRAWN: SJS / VI

B 761769