



REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	FIRST RELEASE	07-25-02	
B	ADDED BULKHEAD CABLE ASSEMBLY INSTRUCTIONS	12-01-10	<i>PSB</i>

PIN NO.	COLOR	FUNCTION
1	GRAY	DATA
3	GREEN	COMMON
4	RED	+5 VOLTS
5	BROWN	CLOCK
	SHELL	SHIELD

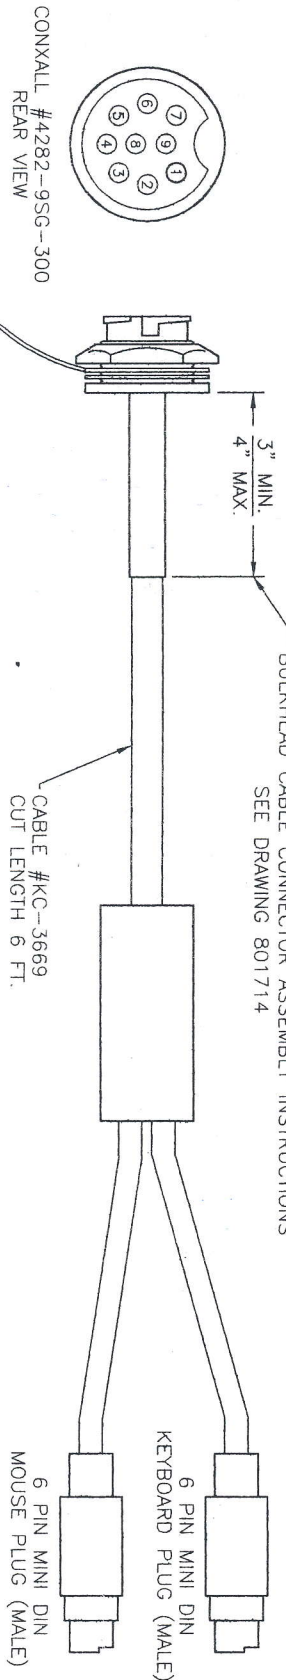

PIN NO.	COLOR	FUNCTION
1	BROWN	CLOCK
2	GRAY	DATA
3	RED	+5 VOLTS
4	GREEN	COMMON
5	VIOLET	CLOCK
6	WHITE	DATA
7	YELLOW	+5 VOLTS
8	BLACK	COMMON
9	---	SHIELD

PIN NO.	COLOR	FUNCTION
1	WHITE	DATA
3	BLACK	COMMON
4	YELLOW	+5 VOLTS
5	VIOLET	CLOCK
	SHELL	SHIELD

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF CTI ELECTRONICS CORP. INC. AND ARE ISSUED IN STRICT CONFIDENCE. AND SHALL NOT BE REPRODUCED, OR COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF EQUIPMENT WITHOUT PRIOR WRITTEN PERMISSION

MOD	NA	QTY	USE	MODEL	FINISH
MOD KIT	NEXT ASS'Y	QTY	USED ON	MODEL	FINISH
APPLICATION					

UNLESS OTHERWISE SPECIFIED DIM AND TEL. AFTER FINISH  
DIMENSIONS ARE IN INCHES  
FRACTIONS DECIMALS ANGLES  
XX ±.01 XXX±.005 3/16"  
MACH. DRN. -.005 TO .015 R DR CHAM  
SH HMTL-BREAK EDGES .005 MAX R  
ALL MACHINE SURFACES TO BE

CTI ELECTRONICS CORPORATION  
WWW.CTIELECTRONICS.COM

BULKHEAD CONNECTOR  
PS/2 KEYBOARD & MOUSE  
(COMPUTER END)

S9S006

APPROVED

SHEET 1 OF 1  
DATE 12-01-10

REV. B  
DRAWN BY  
SJS/PSB