

ORDERING INFORMATION

P PS/2 INTERFACE
 U USB INTERFACE
 I RS-232 SERIAL ASCII (IK09I PROTOCOL, LEGACY SPECIAL ORDER)

I GRAY ELASTOMER WITH SYN-PROOF COATING (WAS 0)
 4BLACK ELASTOMER WITH SYN-PROOF COATING (WAS 5)

OPTIONAL CABLE LENGTH DIMENSION IN 0.5 FOOT INCREMENTS
 (MINIMUM LENGTH IS 1.0 FT, MAXIMUM LENGTH IS 9.5 FT.)
 BLANK [] INDICATES NO CABLE

FR FRENCH "AZERTY" (GRAY ELASTOMER)
 ES SPANISH "QWERTY" (GRAY ELASTOMER)
 DL GERMAN "QWERTZ" (GRAY ELASTOMER)
 BLANK IS DEFAULT US "QWERTY" (GRAY/BLACK ELASTOMER)

K I 8 8 [] - [] - []

SPECIFICATION:
 TEMPERATURE: -40°C TO +80°C
 SEALING: NEMA 4 (IP66)
 WEIGHT: APPROX. 1LBS 2.0Z [.623 KILOGRAMS]
 STANDARDS: CE, ROHS, REACH, FCC CLASS B

CTI ELECTRONICS
 WWW.CTIELECTRONICS.COM


OEM INDUSTRIAL KEYBOARD
 NEMA 4 (IP66)
 MODEL KI8800 SERIES

701672 DATE 02-21-17
 DRAWN BY PSB

APPROVED SHEET 1 OF 2

COPYRIGHT 2018 CTI ELECTRONICS CORP.
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

NOTE: DIMENSIONS ARE IN INCHES MILLIMETERS

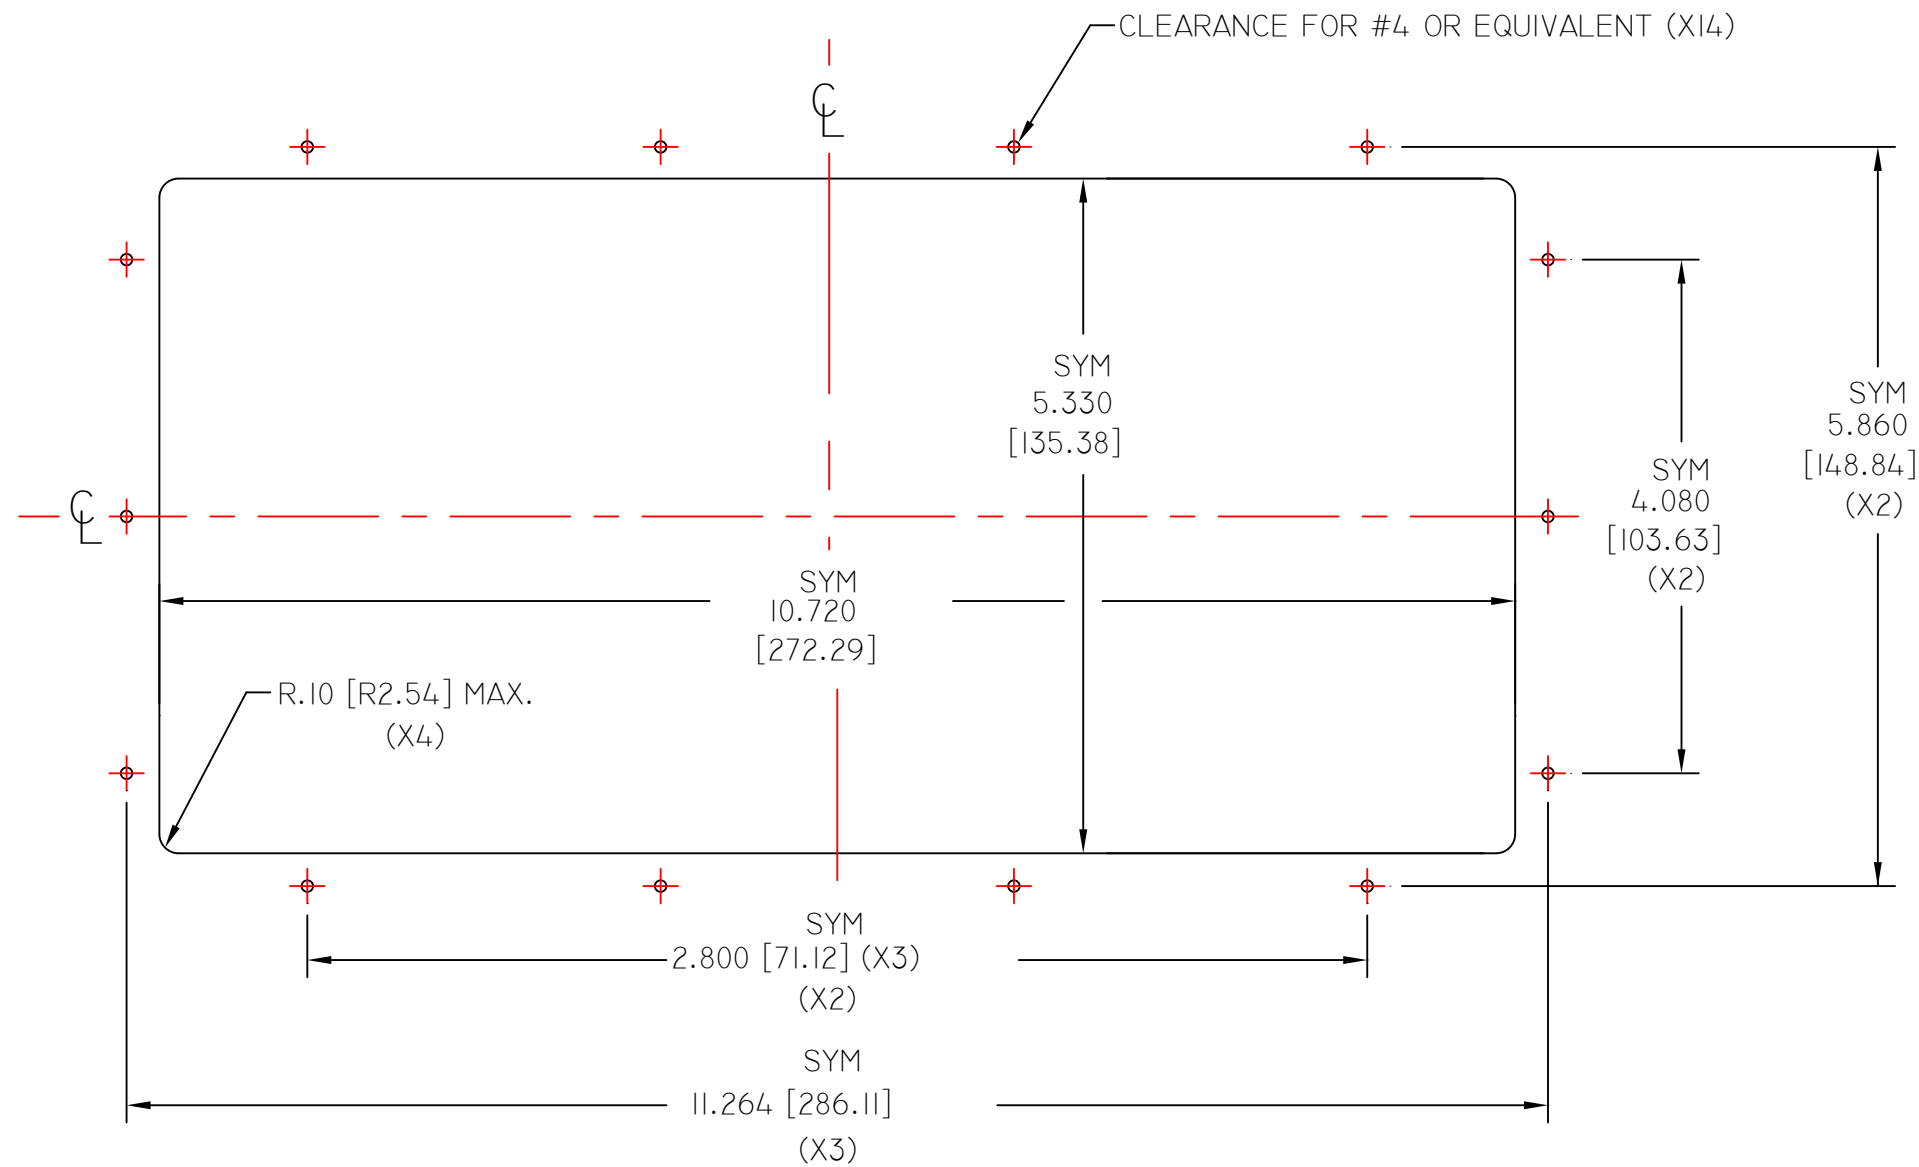

NOTES

1. DEBURR ALL EDGES
2. USE #4 STAINLESS HARDWARE FOR MOUNTING. (X14)
3. TAKE ESD PRECAUTIONS DURING INSTALLATION AS ELECTRONIC COMPONENTS ARE EXPOSED.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS]

<p>CTI <u>ELECTRONICS</u> WWW.CTIELECTRONICS.COM</p>	
<p>OEM INDUSTRIAL KEYBOARD NEMA 4 (IP66) MODEL KI8800 SERIES</p>	
<p>701672</p>	<p>DATE 02-21-17 DRAWN BY PSB</p>
<p>APPROVED</p>	<p>SHEET 2 OF 2</p>
<p>COPYRIGHT 2018 CTI ELECTRONICS CORP. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE</p>	