


ORDERING INFORMATION:

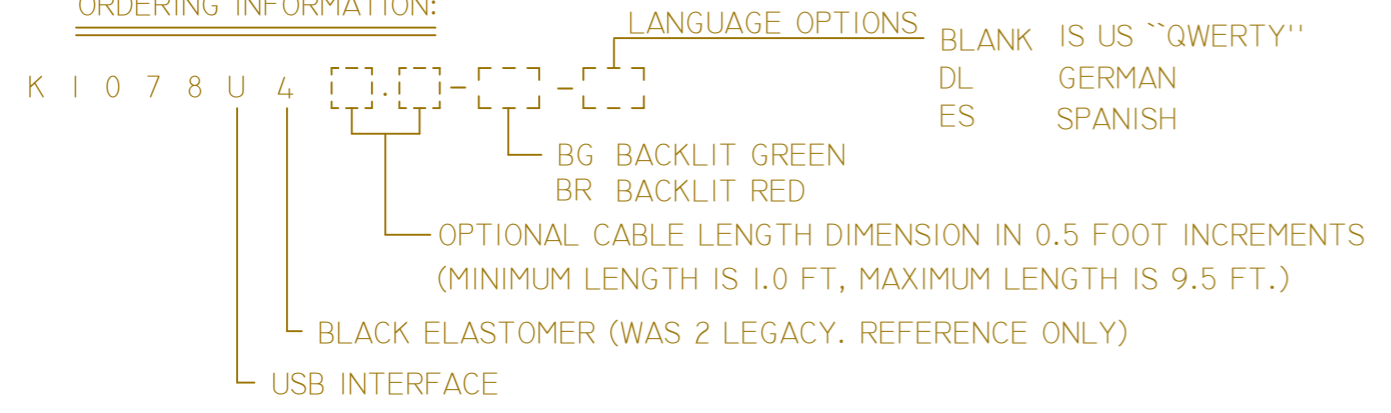

SPECIFICATION:

TEMPERATURE: -40°C TO +80°C
 SEALING: NEMA 4/4X (IP66)
 SHOCK: 40G (N) 11 MSEC. PER MIL-STD-810
 WEIGHT: KEYBOARD WITH PCB APPROX. 12 OZ. (340 GRAMS)
 9.5 FT. CABLE APPROX. 6 OZ. (170 GRAMS)
 STANDARDS: CE, ROHS, REACH, FCC CLASS B
 PATENTS: 7,499,032, OTHERS PENDING


CTI ELECTRONICS CORPORATION
 WWW.CTIELECTRONICS.COM

MODEL K107XU4-BX SERIES
 NEMA 4 (IP66) OEM KEYBOARD
 WITH ORBITALMOUSE
 BUTTON STYLE POINTER
 USB BACKLIT KEYBOARD

761767 DATE 03-01-16

APPROVED SHEET 1 OF 2 DRAWN BY PSB

COPYRIGHT 2016 CTI ELECTRONICS CORP.
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

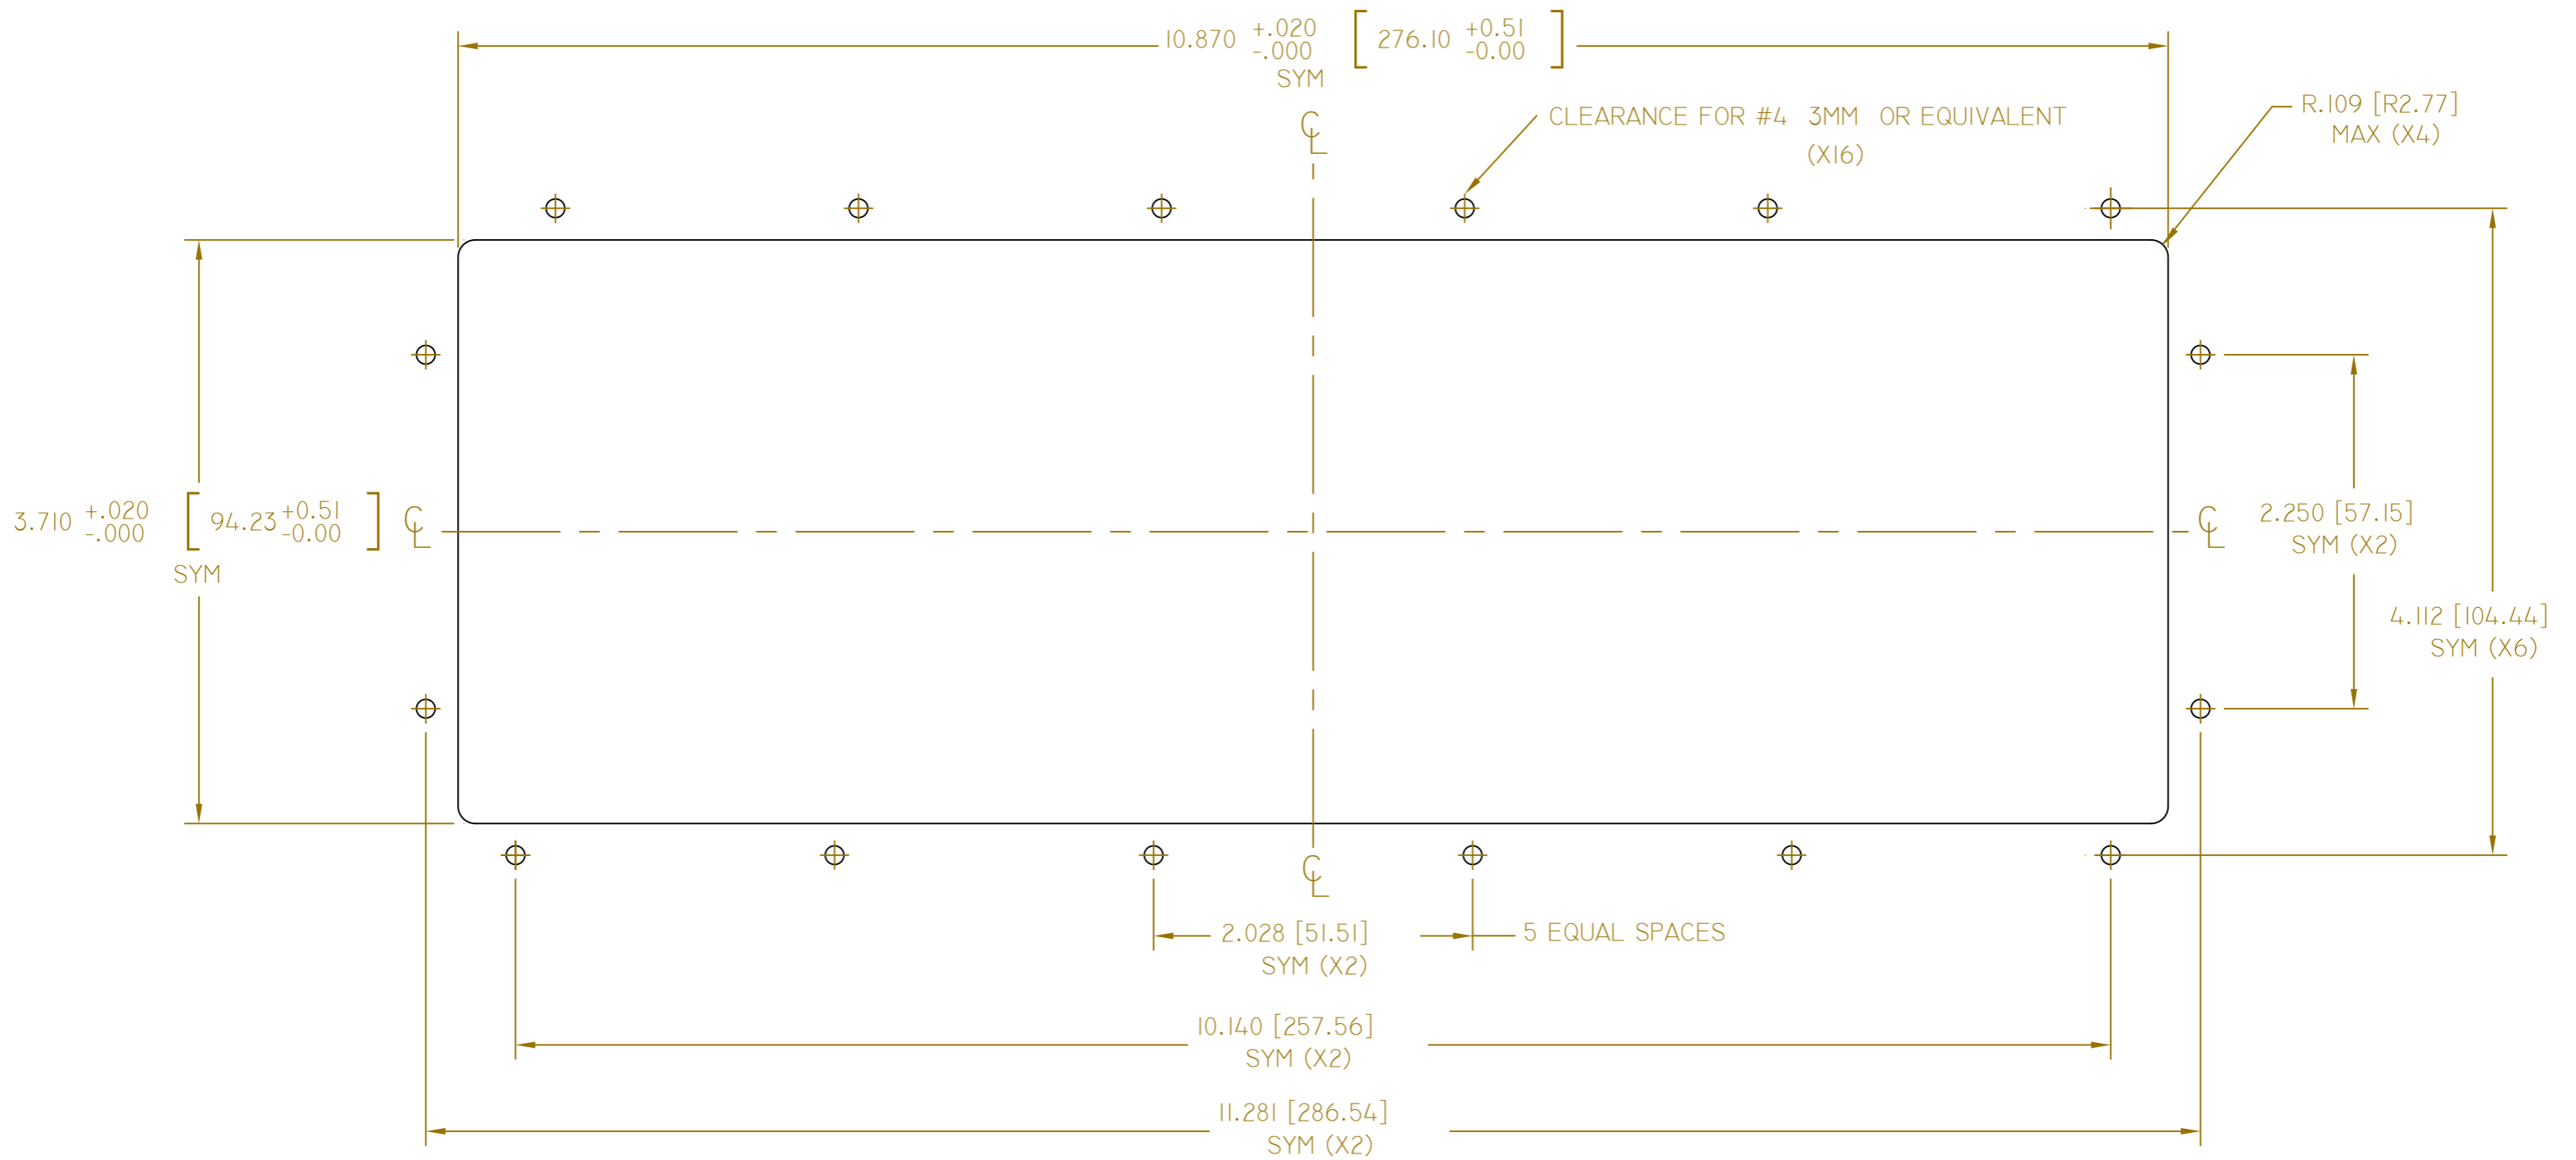

MOUNTING DETAILS

NOTES:

1. DEBURR ALL EDGES
2. USE #4 STAINLESS OR 3MM HARDWARE FOR MOUNTING.
3. TAKE 'ESD' PRECAUTIONS DURING INSTALLATION AS ELECTRONIC COMPONENTS ARE EXPOSED.

CTI ELECTRONICS CORPORATION
 WWW.CTIELECTRONICS.COM

MODEL K107XU4-BX SERIES
 NEMA 4 (IP66) OEM KEYBOARD
 WITH ORBITALMOUSE®
 BUTTON STYLE POINTER
 USB BACKLIT KEYBOARD

761767

DATE 03-01-16

APPROVED

SHEET 2 OF 2

DRAWN BY PSB

COPYRIGHT 2016 CTI ELECTRONICS CORP.
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE