


BLACK SILICONE KEYBOARD WITH SYN-PROOF (tm) COATING


ORDERING INFORMATION:

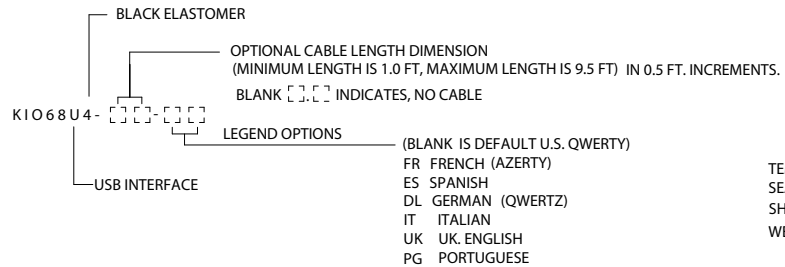

SPECIFICATION:

TEMPERATURE: -40°C TO +80°C
 SEALING: NEMA 4 (IP66)
 SHOCK: 40gn 11 msec. per MIL-STD-810
 WEIGHT: KEYBOARD ASSEMBLY, LESS CABLE, APPROX. 8 OZ. (226 GRAMS) WITH 9.5 FT. CABLE APPROX. 11 OZ. (312 GRAMS)
 STANDARD: CE, ROHS, FCC CLASS B
 PATENTS: 7,499,032, OTHERS PENDING

CTI ELECTRONICS CORPORATION		
110 OLD SOUTH AVE. STRATFORD, CT. 06615 WWW.CTI-ELECTRONICS.COM		
NEMA 4 (IP66) OEM INDUSTRIAL KEYBOARD WITH ORBITAL MOUSE® (BUTTON STYLE POINTER) K106800 SERIES		
761786	SHEET 1 OF 2	REV. C
APPROVED	DATE 07-15-10	DRAWN S.S./PSB

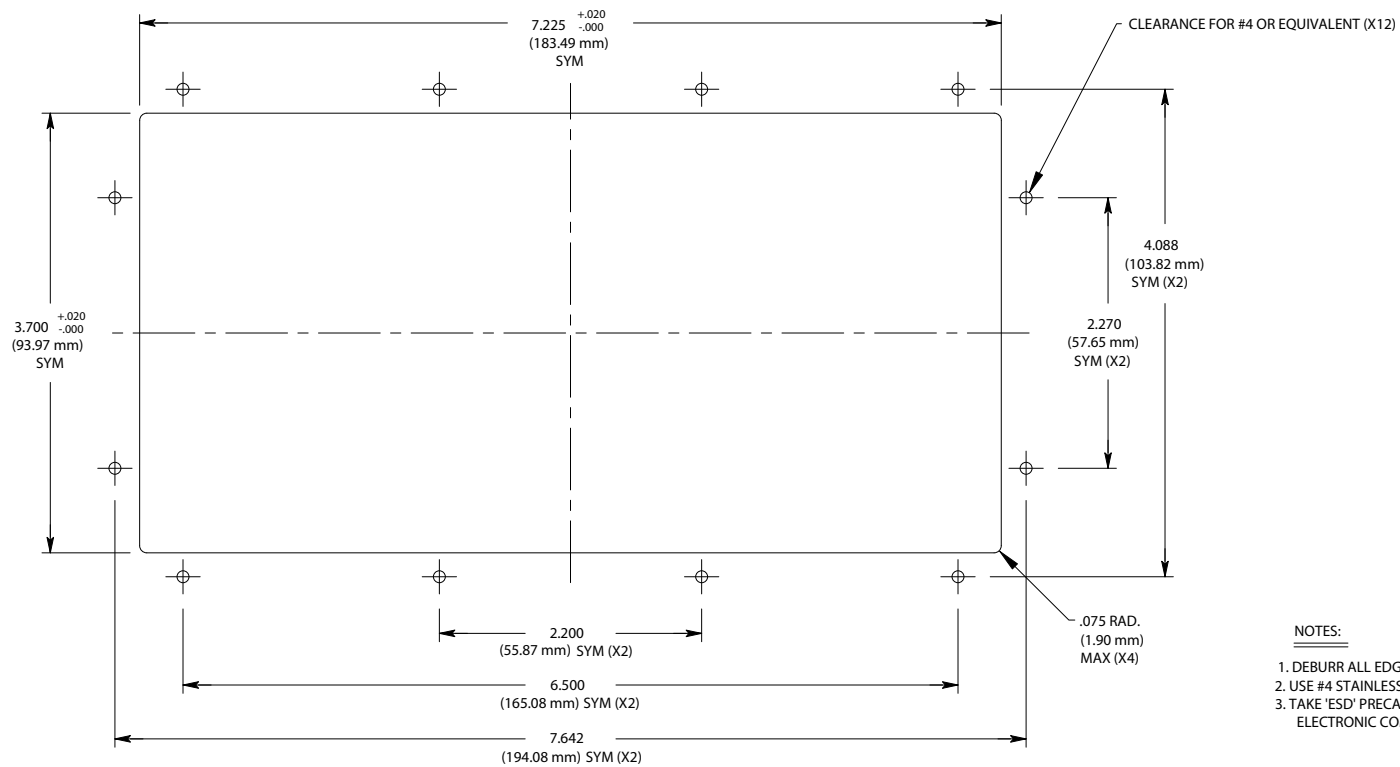

MOUNTING DETAIL

NOTES:

1. DEBURR ALL EDGES
2. USE #4 STAINLESS HARDWARE FOR MOUNTING.
3. TAKE 'ESD' PRECAUTIONS DURING INSTALLATION AS ELECTRONIC COMPONENTS ARE EXPOSED.

CTI ELECTRONICS CORPORATION 110 OLD SOUTH AVE STRATFORD, CT. 06615 WWW.CTI.ELECTRONICS.COM		
NEMA 4 (IP66) OEM INDUSTRIAL KEYBOARD WITH ORBITAL MOUSE ® (BUTTON STYLE POINTER) KI06800 SERIES		
761786 APPROVED	SHEET 2 OF 2 DATE 07-15-10	REV. C DRAWN S.S./PSB