


ORDERING INFORMATION:

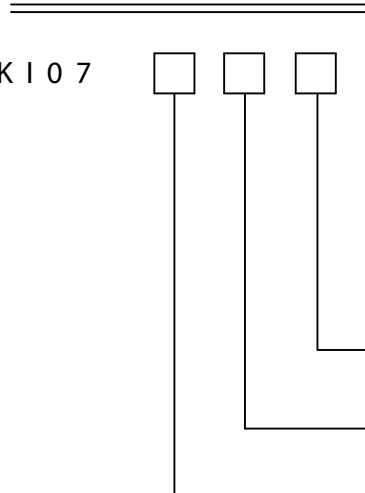

LANGUAGE OPTIONS

BLANK	US "QWERTY"	(GRAY ELASTOMER)
DL	GERMAN "QWERTZ"	(GRAY ELASTOMER)
ES	SPANISH "QWERTY"	(BLACK ELASTOMER)
FR	FRENCH "AZERTY"	(GRAY ELASTOMER)

[W1] THRU [W5] INDICATES OPTIONAL BULKHEAD CONNECTOR, 1 THRU 5 FOOT CABLE LENGTH IN 1 FT. INCREMENTS. [W] IS 6 FT. DEFAULT, PS/2 ONLY (LEGACY). MATING CABLE INCLUDED

- 2 GRAY ELASTOMER
- 4 BLACK ELASTOMER

- P PS/2 INTREFACE (9.5 FT. DEFAULT CABLE LENGTH)
- U USB INTERFACE (9.5 FT. DEFAULT CABLE LENGTH)

- 0 STAINLESS STEEL ENCLOSURE
- 4 ALUMINUM ENCLOSURE, PAINTED BLACK
- 5 ALUMINUM ENCLOSURE, PAINTED BEIGE

SPECIFICATION:

TEMPERATURE: -40°C TO +80°C
 SEALING: NEMA 4/4X (IP66)
 SHOCK: 40G (N) 11 msec. per MIL-STD-810
 WEIGHT: KEYBOARD IN ALUMINUM APPROX. 35 OZ. (1 KILOGRAM)
 KEYBOARD IN STAINLESS STEEL APPROX. 59 OZ. (1.7 KILOGRAMS)
 STANDARD: ☑, ROHS, REACH, FCC CLASS B
 PATENTS: 7,499,032

CTI ELECTRONICS CORPORATION	
WWW.CTIELECTRONICS.COM	
NEMA 4/4X (IP66) KEYBOARD WITH ORBITALMOUSE® BUTTON STYLE POINTER MODEL KIO7000 SERIES	
761796	DATE 09-01-16
APPROVED	SHEET 1 OF 1
DRAWN BY PSB	
COPYRIGHT 2016 CTI ELECTRONICS CORP. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE	