


BLACK SILICONE KEYBOARD WITH SYN-PROOF (tm) COATING

ORDERING INFORMATION:

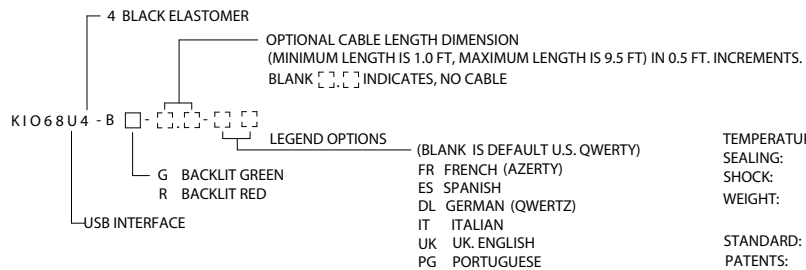

SPECIFICATION:

TEMPERATURE: -40°C TO +80°C

SEALING: NEMA 4 (IP66)


SHOCK: 40gn 11 msec. per MIL-STD-810

WEIGHT: KEYBOARD ASSEMBLY, LESS CABLE, APPROX. 8 OZ. (312 GRAMS)
WITH 9.5 FT. CABLE APPROX. 11 OZ. (85 GRAMS)

STANDARD: CE, ROHS, FCC CLASS B

PATENTS: 7,499,032, OTHERS PENDING

CTI ELECTRONICS CORPORATION 110 OLD SOUTH AVE STRATFORD, CT. 06615 WWW.CTI ELECTRONICS.COM	
NEMA 4 (IP66) OEM INDUSTRIAL KEYBOARD WITH ORBITAL MOUSE[®] (BUTTON STYLE POINTER) KIO6800-BX BACKLIT SERIES	
761800	SHEET 1 OF 2
APPROVED	DATE 07-15-10
	REV. C
	DRAWN S.S/PSB

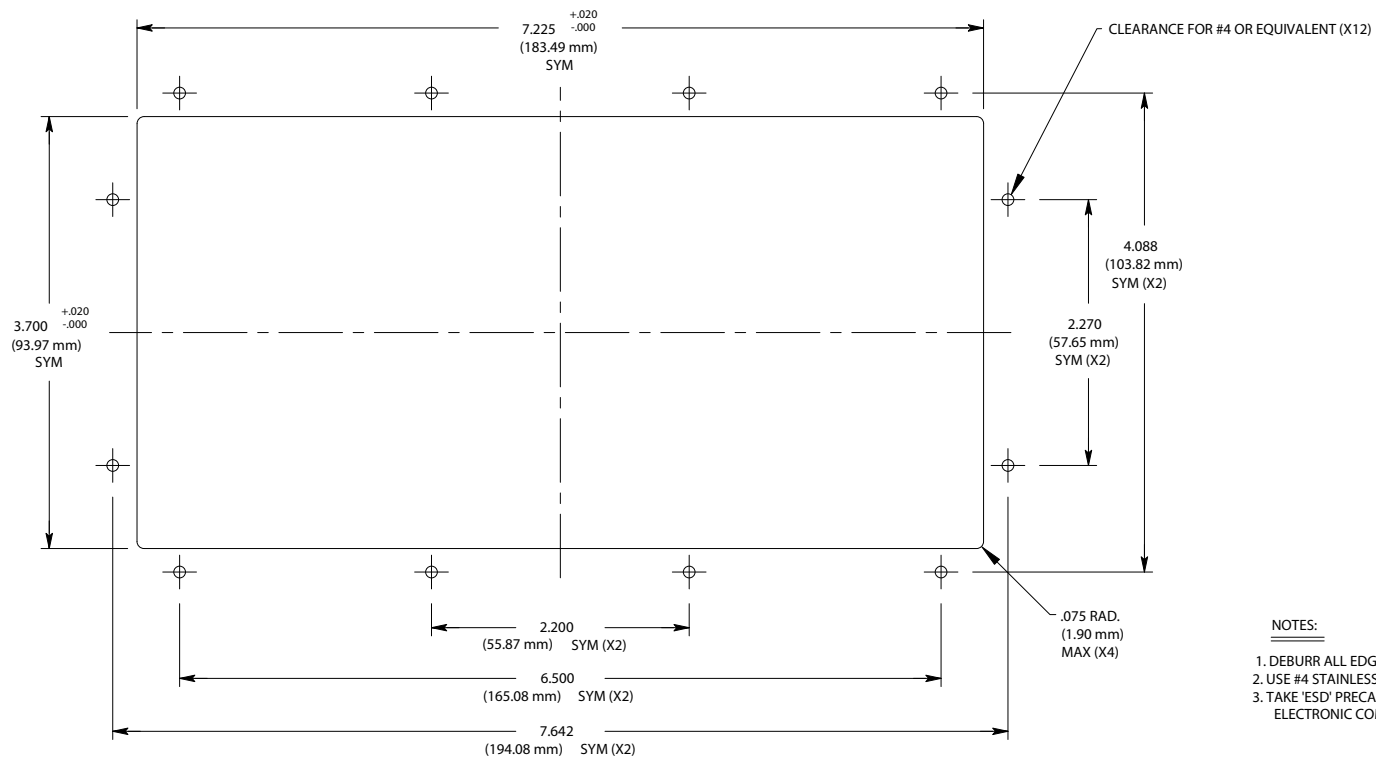

MOUNTING DETAIL

NOTES:

1. DEBURR ALL EDGES
2. USE #4 STAINLESS HARDWARE FOR MOUNTING.
3. TAKE 'ESD' PRECAUTIONS DURING INSTALLATION AS ELECTRONIC COMPONENTS ARE EXPOSED.

CTI ELECTRONICS CORPORATION 110 OLD SOUTH AVE STRATFORD, CT. 06615 WWW.CTI-ELECTRONICS.COM		
NEMA 4 (IP66) OEM INDUSTRIAL KEYBOARD WITH ORBITAL MOUSE [®] (BUTTON STYLE POINTER) KIO6800-BX BACKLIT SERIES		
761800		REV. C
APPROVED	SHEET 2 OF 2 DATE 07-15-10	DRAWN S.S/PSB