

**ORDERING INFORMATION:**

K 1 0 7 8 U 6 - [ ]

OPTIONAL CABLE LENGTH DIMENSION IN 0.5 FOOT INCREMENTS  
(MINIMUM LENGTH IS 1.0 FT, MAXIMUM LENGTH IS 9.5 FT.)  
BLANK [ ] INDICATES, NO CABLE

USB INTERFACE

.125 [ 3.18]  
(X16)

**SPECIFICATION:**

TEMPERATURE: -40°C TO +80°C  
 SEALING: NEMA 4 (IP66)  
 SHOCK: 40G (N) 11 msec. per MIL-STD-810  
 WEIGHT: KEYBOARD WITH PCB: APPROX. 12 OZ. (340 GRAMS)  
 9.5 FT. CABLE ONLY: APPROX. 2.8 OZ. (80 GRAMS)  
 STANDARD: , ROHS, REACH, FCC CLASS B  
 PATENTS: 7,499,032


NOTE: DIMENSIONS ARE IN INCHES [ MILLIMETERS ]

**CTI ELECTRONICS CORPORATION**  
[WWW.CTIELECTRONICS.COM](http://WWW.CTIELECTRONICS.COM)

KIO78U6 SERIES NEMA 4 (IP66)  
 USB MEDICAL/CLEANROOM OEM KEYBOARD  
 WITH ORBITALMOUSE®  
 BUTTON STYLE POINTER

**761871** DATE 12-03-15  
 APPROVED SHEET 1 OF 2 DRAWN BY PSB

COPYRIGHT 2015 CTI ELECTRONICS CORP.  
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

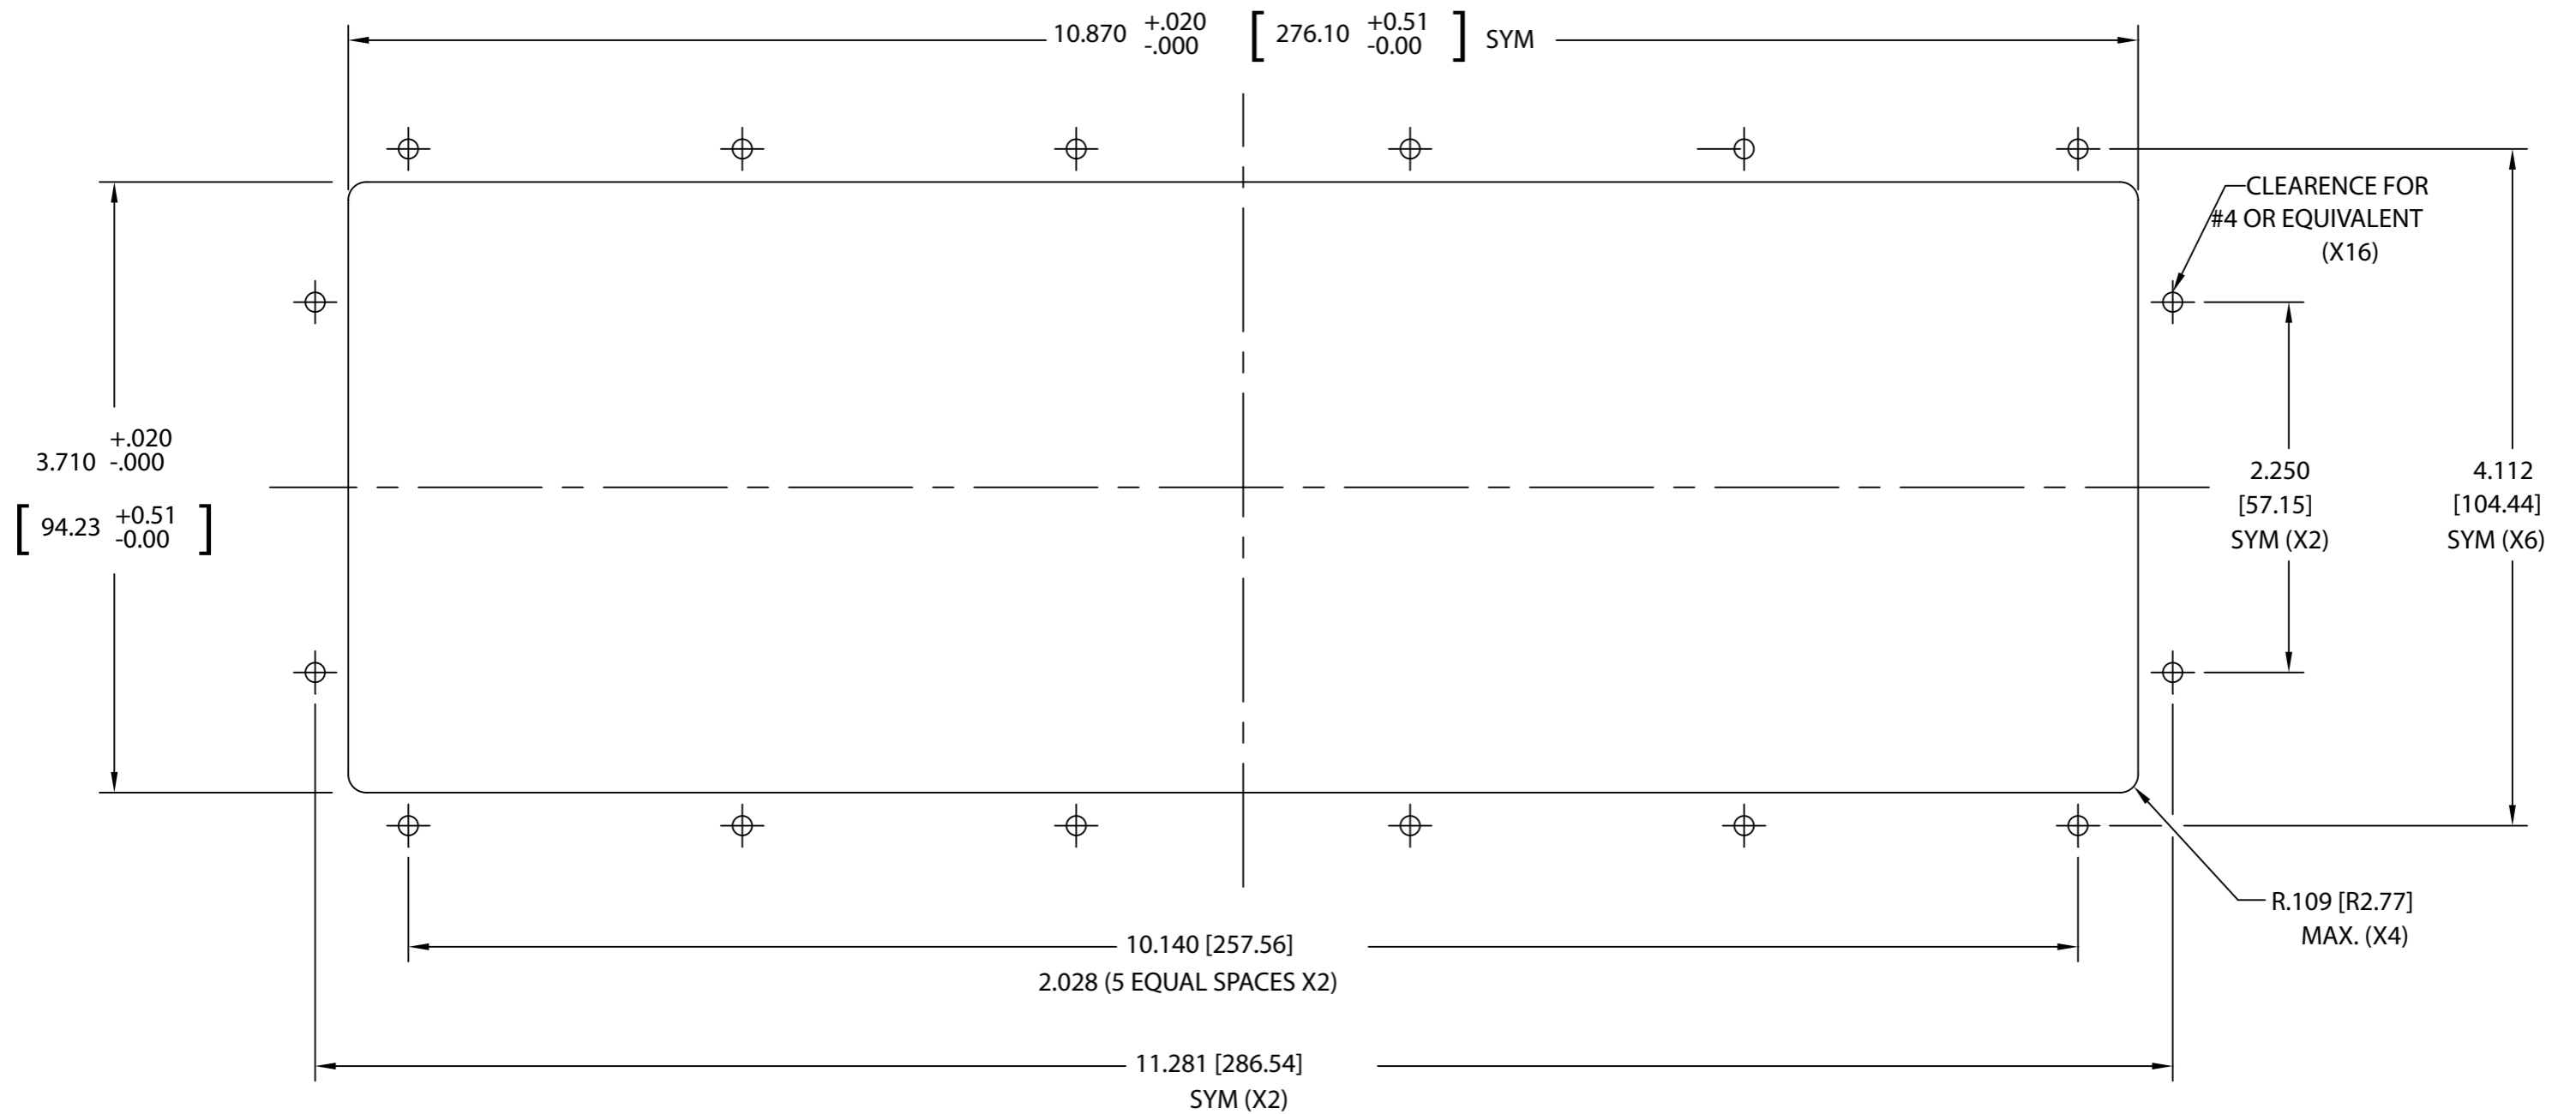

### MOUNTING DETAILS

NOTES:

1. DEBURR ALL EDGES
2. USE #4 [3.00] STAINLESS HARDWARE FOR MOUNTING.
3. TAKE 'ESD' PRECAUTIONS DURING INSTALLATION AS ELECTRONIC COMPONENTS ARE EXPOSED.
4. DIMENSIONS ARE IN INCHES      MILLIMETERS

<b>CTI</b> <u>ELECTRONICS CORPORATION</u>	
WWW.CTIELECTRONICS.COM	
KIO78U6 SERIES NEMA 4 (IP66) USB MEDICAL/CLEANROOM OEM KEYBOARD WITH ORBITALMOUSE® BUTTON STYLE POINTER	
<b>761871</b>	DATE 12-03-15 DRAWN BY PSB
APPROVED	SHEET 2 OF 2
COPYRIGHT 2015 CTI ELECTRONICS CORP. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE	