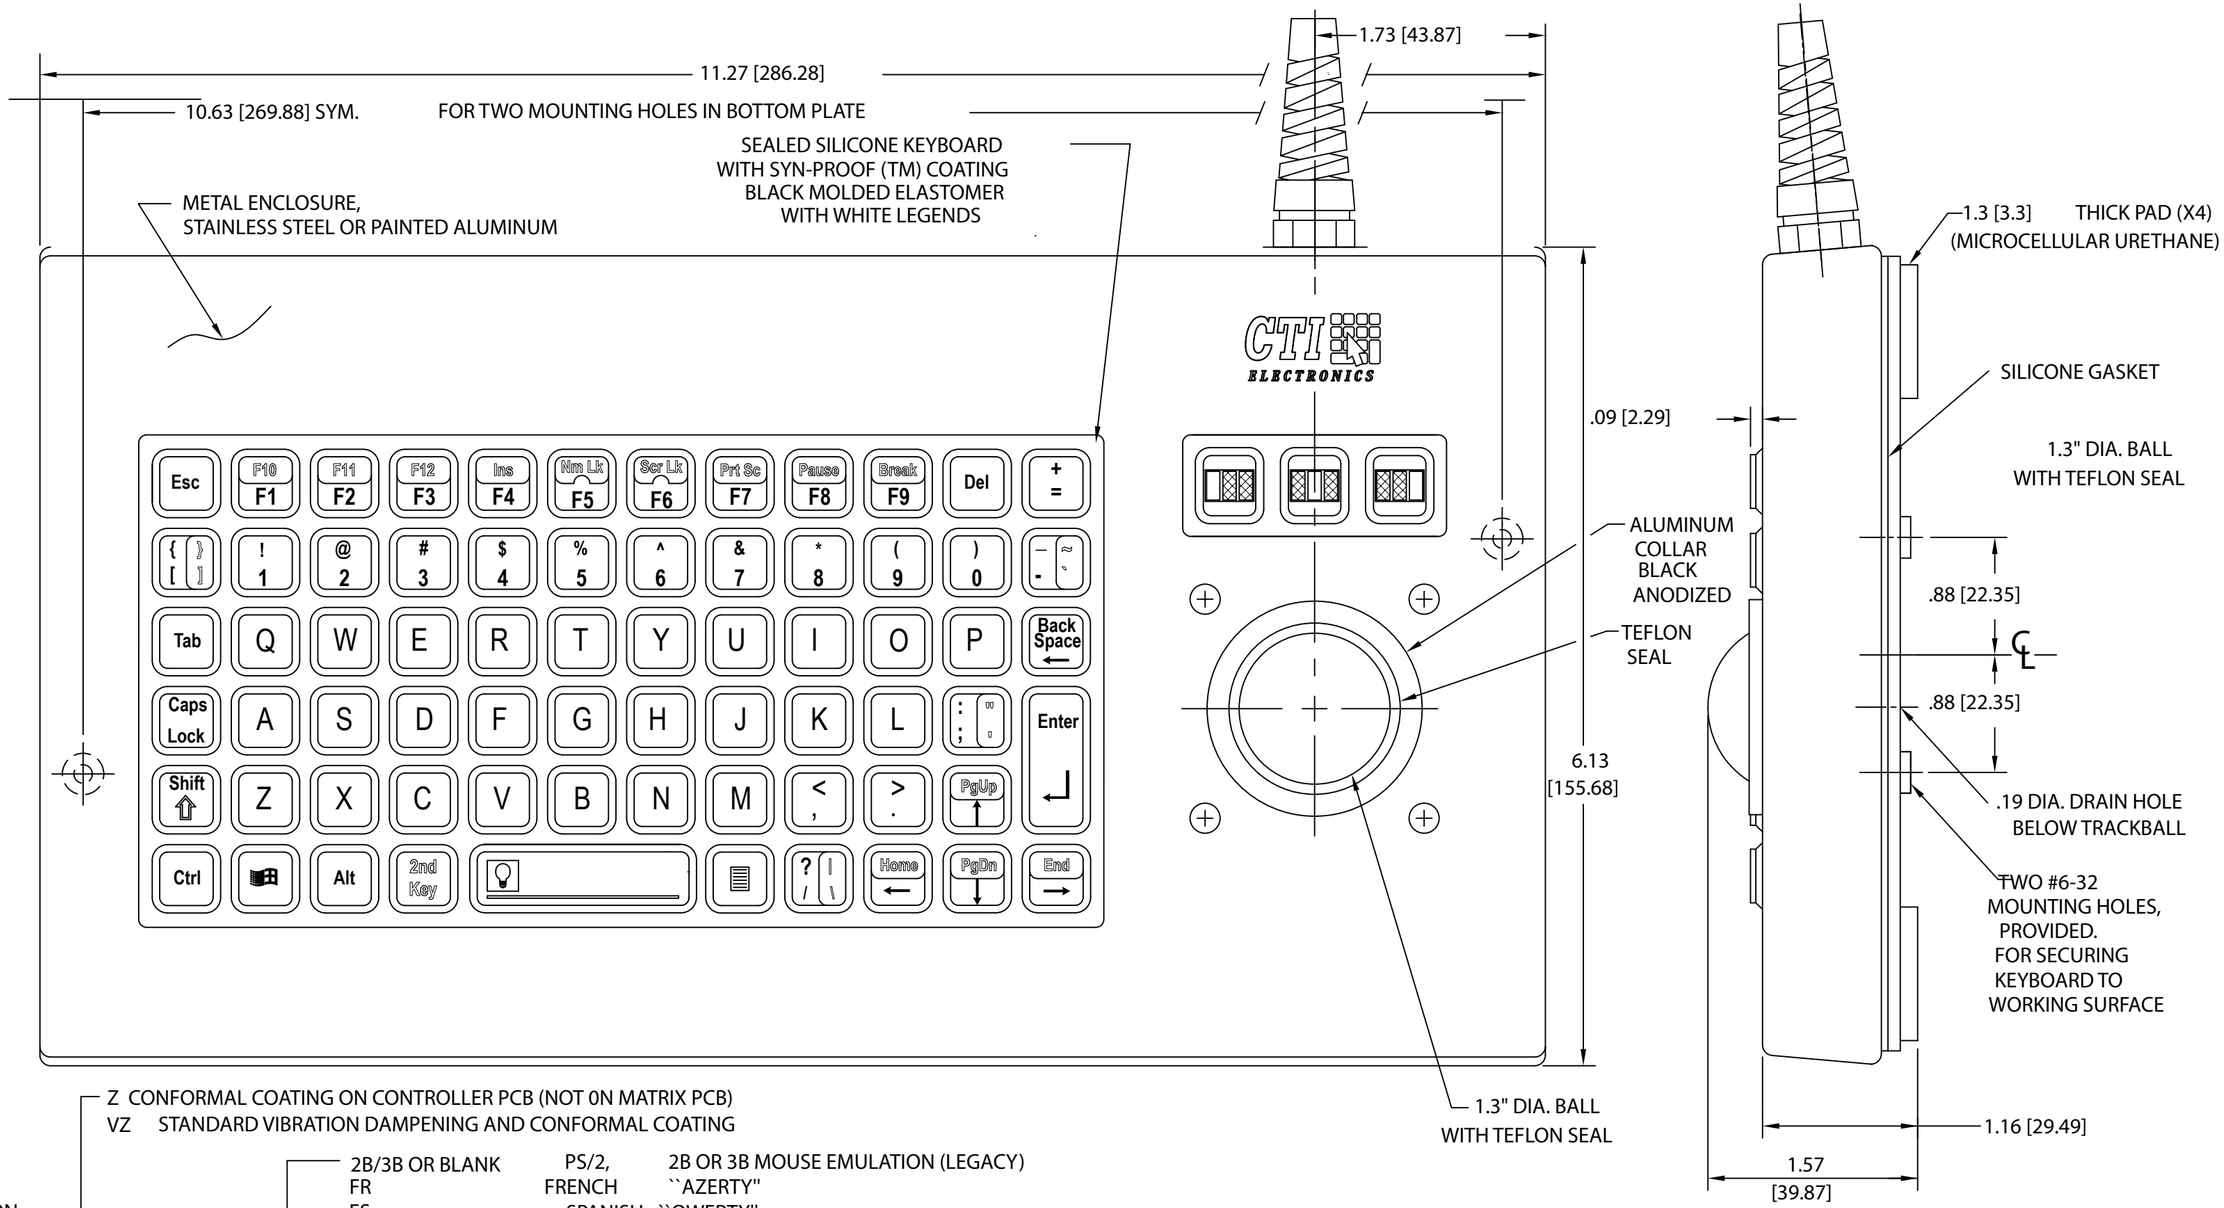

ORDERING INFORMATION:

K I T 6 [ ] [ ] 4 [ ] - [ ] - [ ] - [ ]

- 0 ALUMINUM ENCLOSURE, PAINTED BEIGE
- 4 ALUMINUM ENCLOSURE, PAINTED BLACK
- 6 STAINLESS STEEL ENCLOSURE

- P PS/2 KEYBOARD AND MOUSE
- U USB KEYBOARD AND MOUSE (CABLES ARE 9.5 FT. DEFAULT)

- [WI] THRU [W5] INDICATES OPTIONAL BULKHEAD CONNECTOR, 1 THRU 5 FOOT CABLE LENGTH IN 1 FT. INCREMENTS. MATING CABLE INCLUDED
- [W] IS 6 FT. DEFAULT, PS/2 ONLY (LEGACY)

- BR BACKLIT RED
- BG BACKLIT GREEN

2B/3B OR BLANK	PS/2,	2B OR 3B MOUSE EMULATION (LEGACY)
FR	FRENCH	``AZERTY''
ES	SPANISH	``QWERTY''
DL	GERMAN	``QWERTZ''
BLANK IS DEFAULT	US	``QWERTY''

- Z CONFORMAL COATING ON CONTROLLER PCB (NOT 0N MATRIX PCB)
- VZ STANDARD VIBRATION DAMPENING AND CONFORMAL COATING

SPECIFICATION:

TEMPERATURE:	-25°C TO +80°C
SEALING:	ALL KEYS ARE NEMA 4 (IP66) TRACKBALL NEMA 12 (IP54)
SHOCK:	40G (N) 11 msec. per MIL-STD-810
WEIGHT:	KEYBOARD WITH ALUMINUM ENCLOSURE APPROX. 32 OZ. (.90 KILOGRAMS) KEYBOARD WITH STAINLESS STEEL ENCLOSURE APPROX. 55 OZ. (1.6 KILOGRAMS)
STANDARDS:	CE, ROHS, REACH, FCC CLASS B

NOTE: DIMENSIONS ARE IN INCHES (MILLIMETERS)

CTI ELECTRONICS CORPORATION
WWW.CTIELECTRONICS.COM

KIT6000-BX BACKLIT SERIES
NEMA 12/IP54
INDUSTRIAL KEYBOARD
WITH 1.3"DIA TRACKBALL

761874

SHEET 1 OF 1
DATE 10-20-16
DRAWN BY PSB
APPROVED

COPYRIGHT 2016 CTI ELECTRONICS CORP.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE