

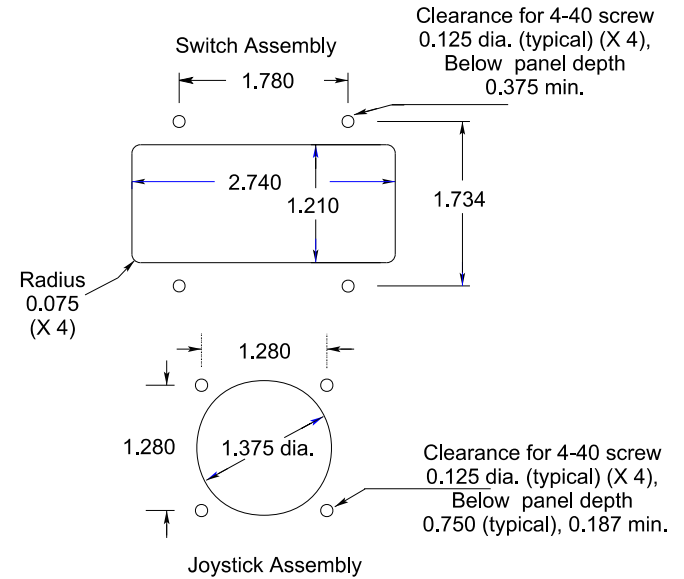


STANDARD CABLE LENGTH 9.5 FEET.

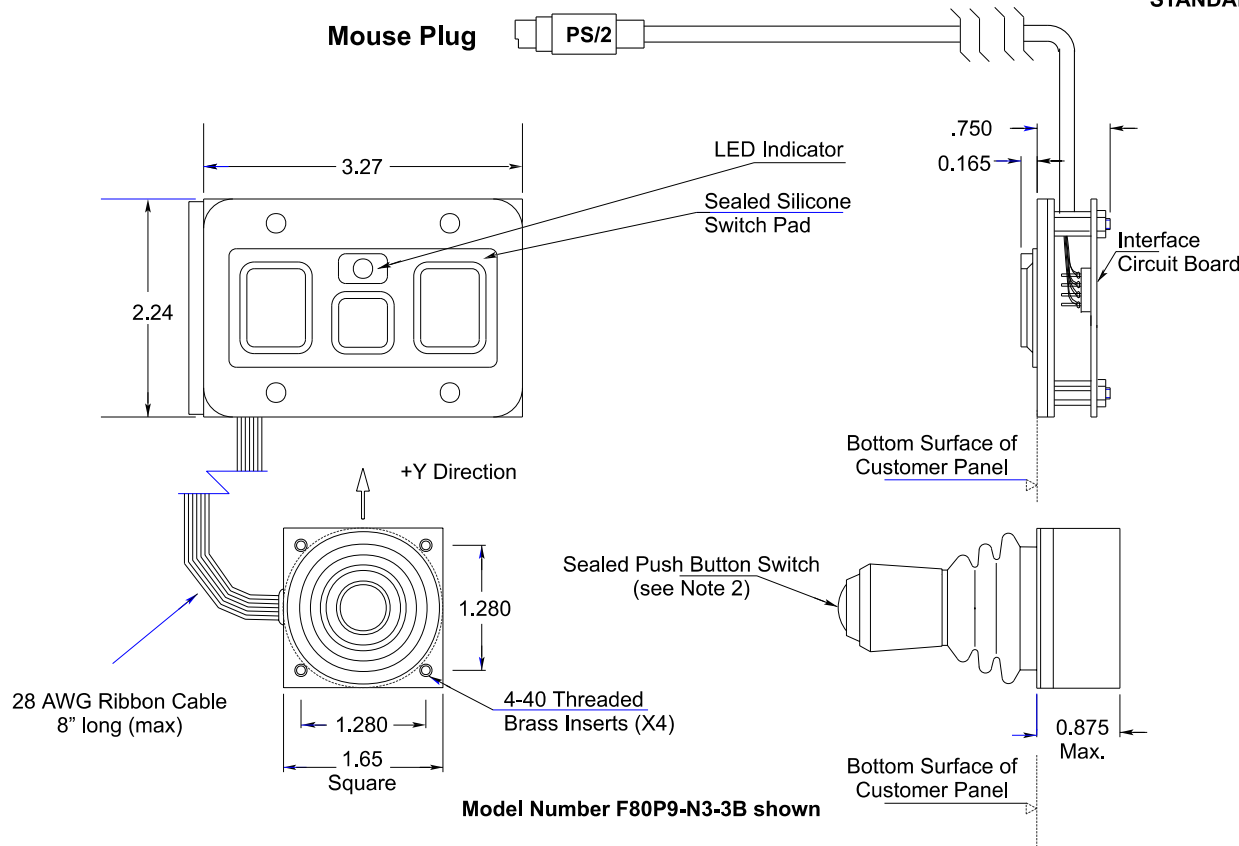

**Panel Cutout Detail**

Note: Joystick cannot be located more than 6" - 8" away from switch card.

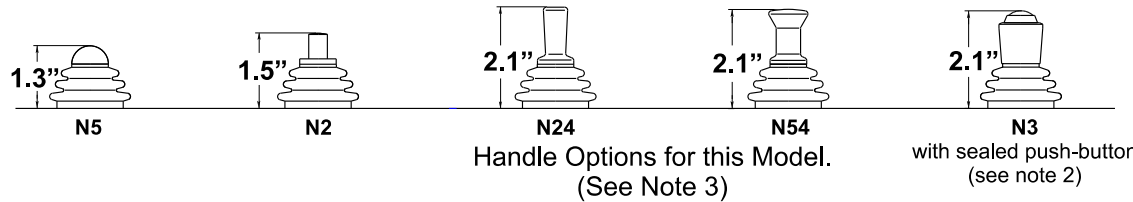

**Operating Temperature Range**  
 -25°C to 70°C Standard  
 -40°C to 80°C Optional

**Watertight to NEMA 4**

**Net Weight**  
 5 oz.

**Notes:**

- 1.) All Dimensions are in inches.
- 2.) The industry exclusive N3 handle includes a NEMA 4 sealed pushbutton that duplicates the "Left Mouse Button" function. Refer to CTI Electronics Applications Note 811613 and 811629 for Industrial Mouse® operation.
- 3.) Any of the handle options shown above may be used for the Industrial Mouse. Please specify at time of order. i.e., Model Number F80P9-N24-3B uses the N24 handle.
- 4.) This product contains static sensitive components. Use appropriate static precautions when handling and installing this product into OEM final assembly.
- 5.) Unit mounts from below panel using (8) stainless steel screws. Refer to Panel Cutout Detail shown above.
- 6.) Consult Factory for other configuration options.

**ORDERING INFORMATION :**

F80P9-N3-3B - OEM Industrial Mouse®, PS/2 mouse port compatible.  
 F8019 Series - OEM Industrial Mouse® for Serial Port applications.  
 (Refer to CTI Applications Drawing 811665 for details).

Industrial Mouse®  
 is a Registered Trademark of  
 CTI Electronics Corporation

Not to Scale

CTI ELECTRONICS CORPORATION  
 110 Old South Ave., Stratford, CT 06615 - Tel 203 / 386-9779 - Fax 203 / 378-4986 - www.ctieletronics.com

CTI REF: 761707

**F8 Series Industrial Mouse**  
**NEMA 4 Rated**

REVISION: A	DATE: 08/29/00	<b>A820044</b> Sheet 1 of 1
APPROVED:	DRAWN: Ray Kirmaier	