


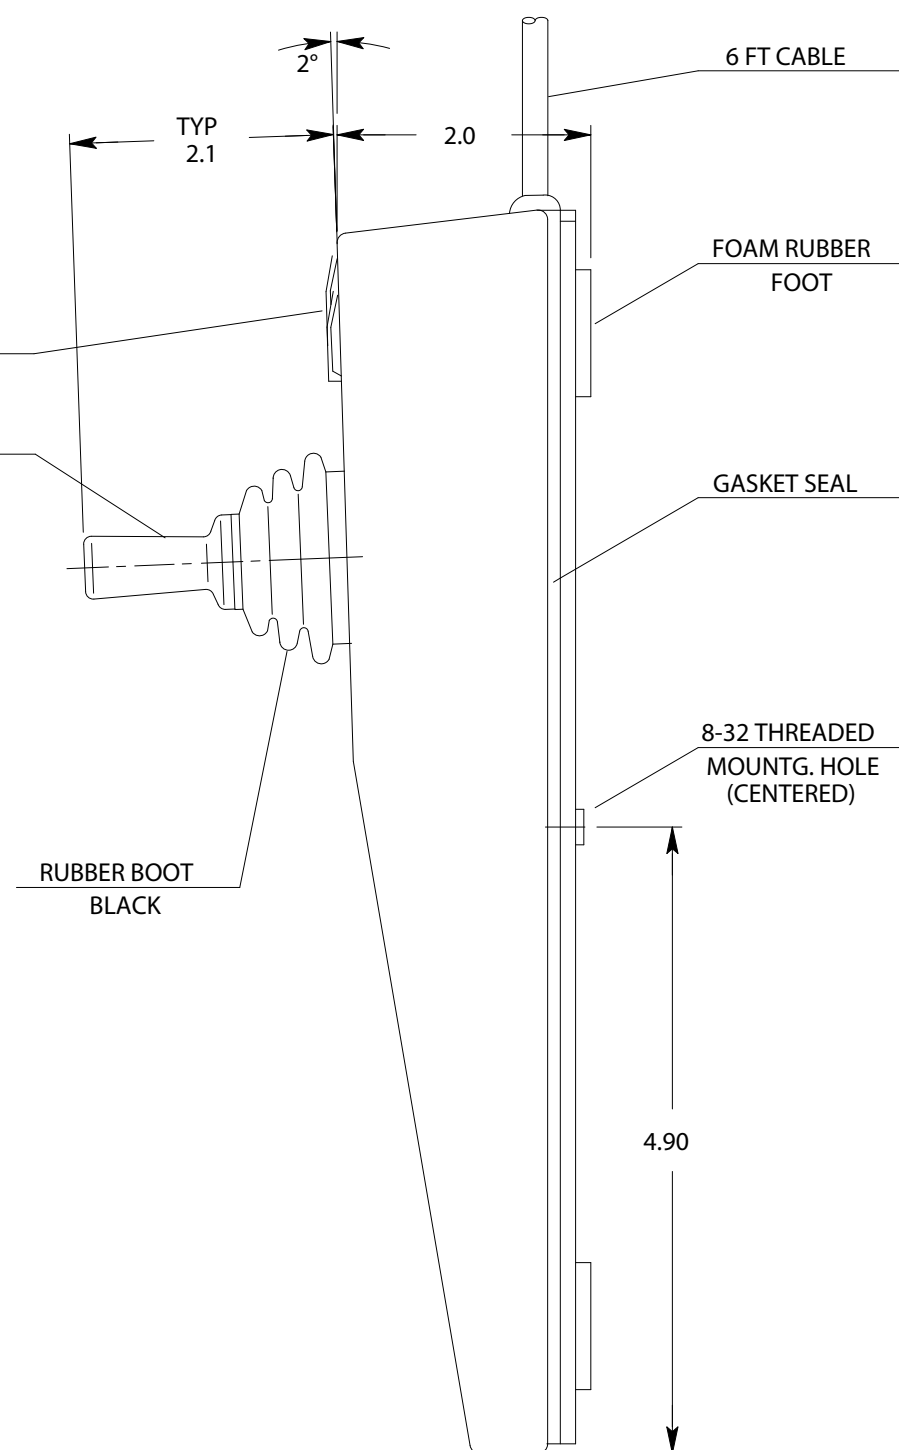

1. MATERIAL : 0.048 SHEET STEEL WITH TEXTURED
PUTTY FINISH
2. BOTTOM COVER : 0.125 ALUMINUM PAINTED
3. ENCLOSURE MEETS NEMA 12 SPECIFICATIONS
AND GASKET MEETS UL-STD-94 FLAMABILITY STANDARD
4. INDUCTIVE JOYSTICK PER CTI SPECIFICATION
REF. B761702
5. SWITCHES RATED FOR 5-MILLION OPERATIONS

M80X3-N24	—————	BASIC MODEL WITH 3 SWITCHES
M80X9-N24	—————	3 SWITCHES WITH 1 LED
M8093-N24	—————	BUS MOUSE (9 PIN MINI DIN CONN.)
M80P9-N24-2B	—————	PS/2 (2 BUTTON EMULATION)
M80P9-N24-3B	—————	PS/2 (3 BUTTON EMULATION)
M8019Q-N24-MSOF	—	SERIAL (RS232) MICROSOFT EMULATION (SEE DWG. B811610 FOR CABLE DETAILS)
M80D3-N24	—————	DEC INTERFACE