


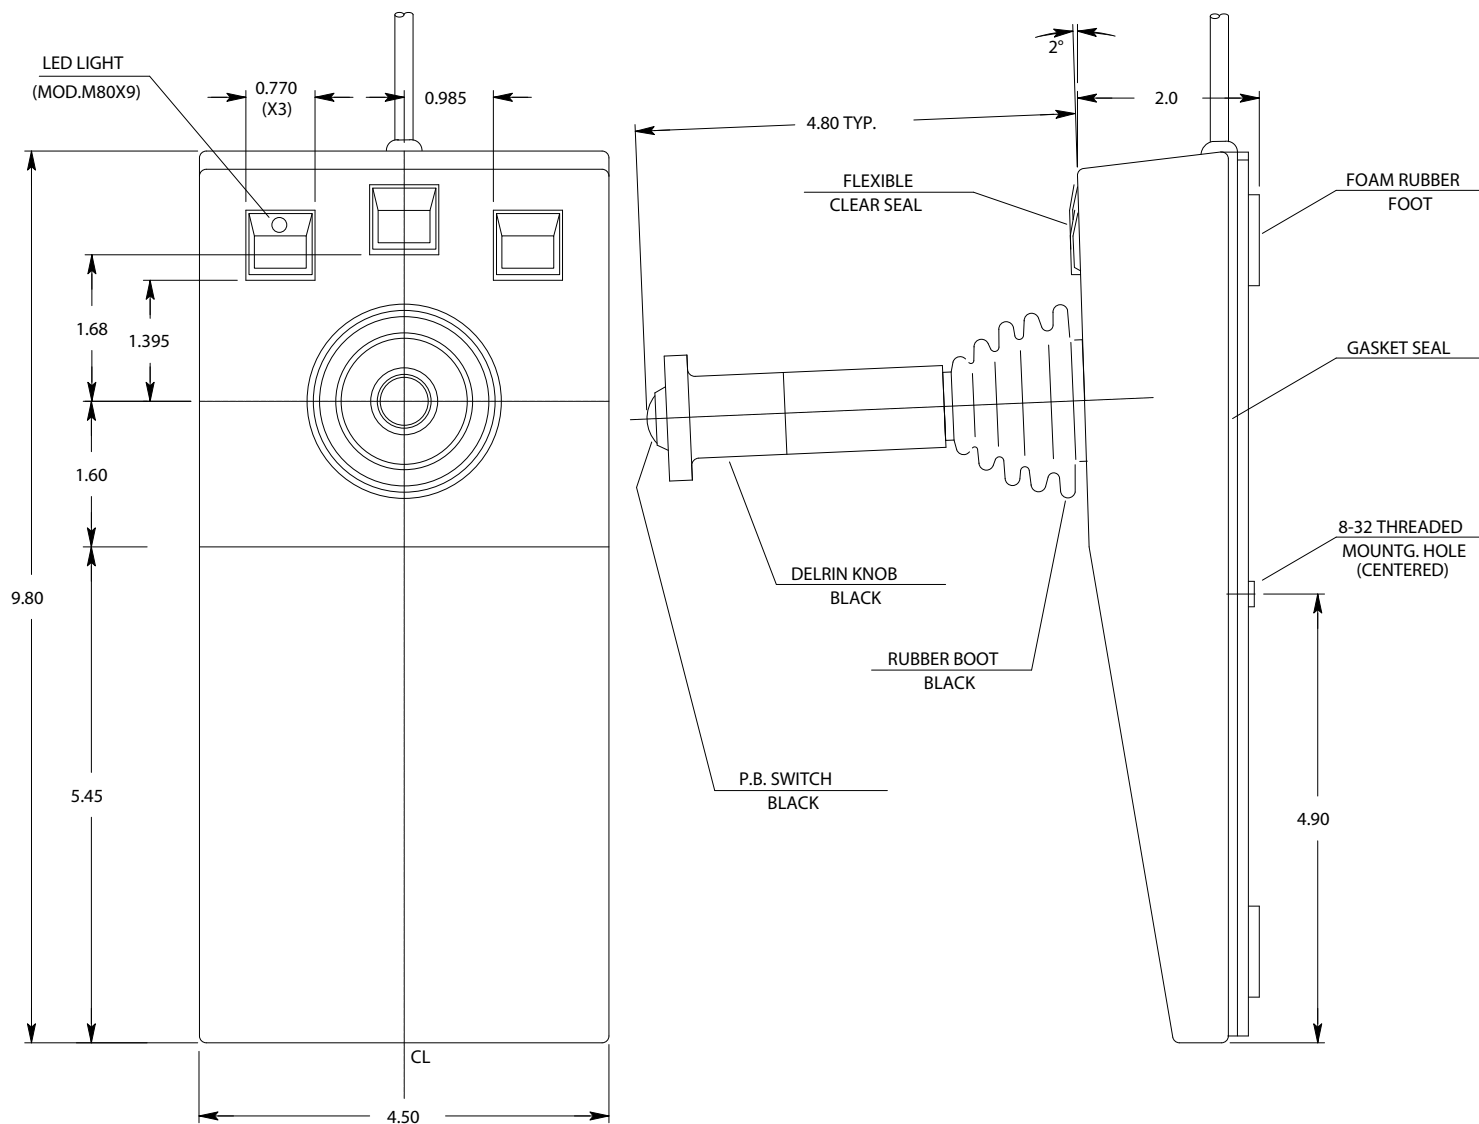

NOTES:

1. MATERIAL : 0.048 SHEET STEEL WITH TEXTURED PUTTY FINISH
2. BOTTOM COVER : 0.125 ALUMINUM PAINTED
3. ENCLOSURE MEETS NEMA 12 SPECIFICATIONS AND GASKET MEETS UL-STD-94 **FLAMABILITY STANDARD**
4. INDUCTIVE JOYSTICK PER CTI SPECIFICATION REF. B761043
5. SWITCHES RATED FOR 5-MILLION OPERATIONS

ORDERING INFORMATION :

M80X3-N62 — BASIC MODEL WITH 3 SWITCHES

M80X3-N62

- 7 - 3 SWITCHES WITH 3 LEDS
- 9 - 3 SWITCHES WITH 1 LED
- 6 - SINGLE AXIS JOYSTICK
- 9 - TWO AXIS NON-SIMULTANEOUS

CTI		ELECTRONICS CORPORATION	
110 Old South Ave., Stratford, CT 06615 - Tel 203 / 386-9779 - Fax 203 / 378-4986 - www.ctielelectronics.com			
TITLE:			
INDUSTRIAL MOUSE MDL.M80X3-N62			
REV.	DATE: 4-25-98		
APPROVED:	DRAWN:	B 761712	
	Vladimir Ilic		